



From the Finest Components from Around the World™

# Dual Zone Chill Platinum Chill Spa

## 2026 Owner's Manual

*Hydrotherapy to Heal Minds and Bodies™*



**READ AND SAVE THESE INSTRUCTIONS**



*Congratulations, You are now the proud owner of the finest spa built. Now you will experience true comfort and relaxation as you never had before. We at Cal Spas® focus on quality, design, and comfort to create a truly luxurious experience like no other. Welcome to the Cal Spas family.*

It is important that you register your Cal Spas product as soon as possible. This can be done by taking a few minutes to complete an online registration form on our website. Allowing us to efficiently help you with parts, support, or other inquiries.

**<https://calspas.com/register-your-spa.php>**

**Locating the Spa Serial Number**

You will need your spas serial number, This serial number is placed on the exterior of the spa. The plate is placed on the lower right hand side when facing the front of the spa. This serial number is unique to your spa, and can be used to order parts, file a warranty claim, and is used in the registration process to activate your spas warranty.

Model: \_\_\_\_\_

Spa Serial Number: \_\_\_\_\_

Purchase Date: \_\_\_\_\_

Dealer's Phone Number: \_\_\_\_\_

Dealer's Address: \_\_\_\_\_

Copyright 2026 Lloyd's Material Supply Company, Inc. All rights reserved. Duplication without written consent is strictly prohibited. Cal Spas®, Adjustable Therapy System™, ATS™, Cal Premium™, Cal Select™, Cal Stone™, XL™ Heater, and Ultimate Fitness Spa Series™, are registered trademarks. Due to continuous improvement programs, all models, operation, and/or specifications are subject to change without prior notice.

LTR.2026.1020  
1/15/2026 Rev C

**Contact Information**  
 For customer service or service technicians, please contact your authorized dealer immediately. If you need additional information and/or assistance, contact

**Lloyd's Material Supply Company, Inc.  
 Customer Service Department  
 1462 East Ninth Street  
 Pomona, CA 91766**

Toll Free: 1-800-CAL-SPAS  
 Fax: 1-909-629-3890

# Table of Contents

|   |    |   |    |
|---|----|---|----|
| Important Safety Instructions .....                 | 5  | <b>Water Clarity</b>                            |    |
| <b>Preparing for Your Spa</b>                       | 7  | 4 Steps to Clear Water .....                    | 44 |
| Planning the Best Location .....                    | 7  | Water Clarity Terms and Definitions .....       | 45 |
| Clearance for Service Access .....                  | 8  | Water testing Methods .....                     | 46 |
| Preparing a Good Foundation .....                   | 8  | Adding Chemicals to the Spa .....               | 46 |
| Opening the Front Panel for Electrical Access ..... | 9  | Balancing Water Chemistry .....                 | 47 |
| Snap in Spa Panels Guide .....                      | 9  | Sanitation & Shock .....                        | 48 |
| Removing Shipping Materials .....                   | 13 | Filtration & Cleaning .....                     | 50 |
| 240 Volt Electrical Installation .....              | 14 | General Water Care Schedule .....               | 51 |
| GFCI Wiring Requirements .....                      | 14 | Generic Names for Chemicals .....               | 51 |
| GFCI Wiring Diagram .....                           | 15 | Common Water Chemistry Questions .....          | 52 |
| 120 Volt Electrical Installation .....              | 16 | Do's and Don'ts .....                           | 53 |
| Filling and Powering Up Your Spa .....              | 17 | Bather Loads & Ozonator .....                   | 54 |
| Priming the Pump .....                              | 20 | Troubleshooting Water Clarity .....             | 54 |
| <b>Control Systems</b>                              |    | Chemical Abuse .....                            | 55 |
| <b>ink.336 Control Panel</b> .....                  | 21 | <b>Cleaning and Maintenance</b>                 |    |
| General Operation .....                             | 22 | Jet & Pillow Removal/Replacement .....          | 56 |
| Panel Lock .....                                    | 22 | Draining your Portable Spa .....                | 57 |
| Custom Key Feature .....                            | 23 | Winterizing (Cold Climate Draining) .....       | 58 |
| Controller Programming .....                        | 24 | Cleaning and Replacing the Filter .....         | 58 |
| Setting Filtration Cycle .....                      | 25 | Vacation Care .....                             | 58 |
| Economy Mode .....                                  | 25 | Spa Cover and Locking System Installation ..... | 59 |
| Additional Programming .....                        | 26 | Spa Cover and Shell Maintenance .....           | 61 |
| Error messages .....                                | 28 | Using the Freedom Sound System .....            | 61 |
| <b>Chiller Control Panel</b> .....                  | 30 | Basic Troubleshooting .....                     | 62 |
| Quick Reference .....                               | 32 | Thermal Creep .....                             | 64 |
| Setting Chill Temperature Point .....               | 33 | Setting Up Hot Spa Wifi Module .....            | 65 |
| The Set Key .....                                   | 33 | in.touch Wifi App Quick Start .....             | 67 |
| Setting the Time of Day .....                       | 34 | <b>Appendix</b>                                 |    |
| Cool Down Timer & User Timer (Device Timeout) ..... | 34 | Order Replacement Parts Online .....            | 70 |
| Filtration Information .....                        | 35 | Replacement Parts .....                         | 71 |
| Vacation Mode Setting .....                         | 35 | Limited Warranty .....                          | 76 |
| Flip Screen and Menu Navigation .....               | 36 |   |    |
| <b>Chiller Wifi (Option)</b> .....                  | 38 |   |    |
| Connecting the Chiller .....                        | 38 |   |    |
| Connecting with the SmarTouch App .....             | 38 |   |    |
| <b>Spa Features</b>                                 |    |   |    |
| LED Lighting .....                                  | 42 |   |    |
| Diverter Knobs & Air Venturis .....                 | 42 |   |    |
| Waterfall and Jets .....                            | 42 |   |    |

# IMPORTANT SAFETY INSTRUCTIONS

 **READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY**  
When using and installing this spa, basic safety precautions should always be followed, including.

-  **Danger: RISK OF SEVERE INJURY OR DROWNING!**
- NO DIVING, diving may result in injury or death.
  - Do not allow children to be in or around the spa unless a responsible adult supervises them.
  - Keep the spa cover on and locked when not in use
  - See instructions enclosed with your cover for locking procedures.

 **Danger: SUCTION ENTRAPMENT HAZARD, RISK OF SEVERE INJURY OR DROWNING!**  
Suction in suction fittings when broken, damaged, cracked, or unsecured can cause severe injury and or death due to the following entrapment hazards.

- **Body Entrapment:** A negative pressure applied to a large portion of the body or limbs can result in entrapment.
- **Hair Entrapment:** Hair can be sucked in or caught within the suction fitting.
- **Evisceration/Disembowelment Entrapment Risk:** Negative pressure applied directly to the intestines through a damaged/unprotected suction outlet. This can result in Evisceration/Disembowelment.
- The suction fittings in this spa are sized to match the specific water flow created by the pump. Should the need arise to replace the suction fittings, or the pump, be sure the flow rates are compatible.
- The suction fitting is made with chemical resistant plastic, that will last over a finite period of time. This component will degrade and become brittle after constant exposure to sanitizers. When performing maintenance on the spa, inspect suction fittings for any cracks or damage.
- When the spa is in operation, suction is created within the suction fittings. Persons within the spa should not be leaning on, stepping on, or making contact with suction fittings.

-  **Danger: RISK OF SEVERE INJURY FROM ELECTRIC SHOCK OR DEATH FROM ELECTROCUTION.**
- Install the spa at least 5 feet (1.5 meters) from all metal surfaces. As an alternative, a spa may be installed within 5 feet (1.5 meters) of metal surfaces if each metal surface is permanently bonded by a minimum of 8 gauge AWG solid copper conductor to the outside of the spas control box.
  - DO NOT permit any external electrical appliances, such as lights, telephones, radios, television, etc, within 5 feet (1.5 meters) of the spa. Never attempt to operate any electrical device from inside the spa.
  - Replace any damaged power cord immediately.
  - Never bury any power cord, a proper conduit must be used.
  - Connect to a proper grounding-type receptacle or to a proper grounding post in the GFCI and breaker.

-  **Warning: RISK OF HYPERTHERMIA (OVER-HEATING) CAUSING SEVERE INJURY, BURNS, WELTS, OR DEATH**
- Water temperature in excess of 104°F (40°C) may be detrimental for your health.
  - The spa water should never exceed 104°F (40°C). Water temperatures between 100°F (38°C) and 104°F (40°C) are considered safe for a healthy adult.
  - Lower water temperatures are recommended for young children and sensitive persons, and when the spa use exceeds 10 minutes.
  - Before using the spa, the user should measure the water temperature since the tolerance of water temperature regulating devices varies.
  - **Do not use the spa if drugs, alcohol, or prescription medications were consumed before or during use. In an altered state of mind, the human body can not react properly to changes in temperature. This increases your risk of hyperthermia, injury, drowning, or death.**

**Warning: RISK OF HYPERTHERMIA (OVER-HEATING) CAUSING SEVERE INJURY, BURNS, WELTS, OR DEATH**

- Water temperature in excess of 104°F (40°C) may be detrimental for your health.
- The spa water should never exceed 104°F (40°C). Water temperatures between 100°F (38°C) and 104°F (40°C) are considered safe for a healthy adult.
- Lower water temperatures are recommended for young children and sensitive persons, and when the spa use exceeds 10 minutes.
- Before using the spa, the user should measure the water temperature since the tolerance of water temperature regulating devices varies.
- **Do not use the spa if drugs, alcohol, or prescription medications were consumed before or during use. In an altered state of mind, the human body can not react properly to changes in temperature. This increases your risk of hyperthermia, injury, drowning, or death.**
- Symptoms of excessive hyperthermia include dizziness, lethargy, drowsiness and fainting. The effects if excessive hyperthermia may include:
  - Failure to perceive heat
  - Unawareness to impending hazards and
  - Failure to recognize the need to exit the spa
  - Fetal damage to pregnant woman
  - Physical inability to exit spa
  - Unconsciousness

**Warning: REDUCE RISK OF HEAT RELATED INJURY OR DEATH**

- Prolonged exposure to hot air or water can induce hyperthermia. Hyperthermia occurs when the internal temperature of the body reaches a level between 3°F (2°C) to 6°F (4°C) above the normal body temperature of 98.6°F (37°C). While using warm spa water has many health benefits, it's important to make sure that your body's core temperature does not rise above 103°F (39.5°C).
- High water temperatures have a high potential for causing fetal damage during pregnancy. Women who are pregnant, or think they are pregnant should always check with their physician prior to spa usage.
- The use of alcohol, drugs or medication before or during spa use may lead to unconsciousness, with the possibility of drowning.
- Persons suffering from obesity, a medical history of heart disease, low or high blood pressure, circulatory system problems or diabetes should consult a physician before using the spa.
- Persons using medications should consult a physician before using the spa since some medications may induce drowsiness or impair judgment. Other medications or drugs may affect heat rate, blood pressure and circulation.

**HYPOTHERMIA: Hypothermia occurs when the body's temperature drops below 95F (35C)****Signs of mild Hypothermia (body core temperature 95F to 89.6F // 35C to 32C)**

- Shivering and chattering teeth
- Exhaustion
- Clumsiness, slow movements, and reactions, prone to falling
- Sleepiness
- Weak Pulse
- Fast heart rate
- Rapid breathing
- Pale skin color

 **Dually Spa for Outdoor Use Only: Proper ventilation of Chiller is necessary for safe and optimal operation.**

 **Proper Ventilation: Proper ventilation of Chill Spa necessary for optimal operation.**

The Chill Spa uses a water chiller which will generate warm exhaust air from the cooling of the Chill Spa. The Chill Spa is designed for outdoor use, for proper airflow allow up to 3' - 5' feet of space around the unit without obstructions. **DO NOT OBSTRUCT THE EXHAUST VENTS**, blocking these vents will be detrimental to the operation of the Chill Spa, with higher energy consumption and slower cooling speeds.

**Never install the unit in a closed room with a limited air volume** in which the exhaust air expelled from the unit will be reused, or close to shrubbery that could block the air inlet. Such locations hinder the continuous supply of fresh air, resulting in reduced efficiency and possibly preventing sufficient cooling/heating output.



**DO NOT USE THE CHILL SPA FOR EXTENDED PERIODS OF TIME**



Extended use of the chill spa in temperatures bellow 60F can increase your risk of hypothermia.

Contact medical services if symptoms of hypothermia arise.

Call 911 in a medical emergency.

 **WARNING:** People with infectious diseases or diarrhea should not use a spa or hot tub.

 **WARNING:** To avoid injury, exercise caution when entering or exiting a spa.

 **WARNING:** Do not quickly jump between different water temperatures, allow the body to acclimate to changes in warm or cold water. Failure to do so may lead to muscle spasms, fatigue, shock, or loss of consciousness.



 **WARNING:** Prolonged immersion in a spa or hot tub may be injurious to your health.



**CAUTION:** Maintain proper water chemistry and sanitizer, in accordance with the manufacture's instructions.

**CAUTION:** Always exercise care when entering and exiting the spa.

 **WARNING: NO DIVING, diving may result in injury or death.**

**READ AND SAVE THESE INSTRUCTIONS**



## Preparing for Your Spa

### The Dually Spa

Welcome to your Dually spa. This spa is unique as it houses two separate spa partitions within one frame. The two partitions are the cold chiller side and the traditional hot side. **Throughout this manual the chiller side will be referred to as the “chill spa” or the “chill spa side” directly if referring to the cold side of the spa in this owners manual.** Spas with dual temperature zones achieve the best of both worlds for hydrotherapy.

### Pre-Delivery Checklist

Most cities and countries require permits for exterior construction and electrical circuits. In addition, some communities have codes that require residential barriers, such as fencing and/or self closing gates on property to prevent unsupervised children from entering the property. Your dealer can provide information on which permits may be required and how to obtain them prior to the delivery of the spa.

## Planning the Best Location

### Pre-Delivery Checklist

Do not place your spa within 10 feet (3m) of overhead power lines.

### Consider How You Will Use Your Spa

How you intend to use your spa will help you determine where you should position it. For example, will you use your spa for therapeutic purposes? Recreational use? If your spa is intended for recreational use make sure to leave plenty of room around it for activity. If you intend to use the spa for relaxation and therapy, you will probably want to create a specific mood around it

### Plan for Your Environment

If you live in a region where it snows in the winter or rains frequently, place the spa near a house entry. By doing this you will have a space to change clothes and not be uncomfortable.

### Consider Your Privacy

In cold-weather climate, bare trees won't provide much privacy. Take into consideration year round climate when looking for the best privacy options for you spa. Consider the view of your neighbors as well

### Before Delivery

- Plan your delivery route
- Choose a suitable location for the spa
- Lay a 5-8 cm concrete slab
- Install dedicated electric supply

### After Delivery

- Place spa on Slab
- Connect electrical components

### Provide a View with Your Spa

Think about the direction you will be facing when sitting in your spa. Do you have a special landscaped area in your home you find enjoyable? A area that takes advantage of a good view, or a favorite spot that catches a soothing breeze throughout the day.

### Keep Your Spa Clean

In planning your spa's location, consider a location where the path to and from the house can be kept clean and free of debris. Prevent dirt and contaminants from being tracked into the spa. Place a bath mat next to the spa entrance to allow users to clean their feet before going into the spa. Sunscreen and tanning lotions that don't properly absorb into the skin will contaminate the water, adjust filtration times if needed.

**Note:** some sunscreens require application 15-20 minutes before exposure to water.

### Allow for Service Access

Make sure the spa is positioned with access to all side panels to access internal equipment. It is important that all side panels are not blocked.


Many people choose to install a decorative structure around their spa, if you are installing your spa with any type of structure on the outside, such as a gazebo, remember to allow access for service. We recommend designing surrounds for your spa that can easily be moved or lifted off the ground.



**Dually Spa for Outdoor Use Only: Proper ventilation of Chiller is necessary for safe and optimal operation.**

The Dually Spa uses a water chiller to lower the water temperature within the chill side. The chiller operates similarly to a HVAC system. The chiller operates efficiently when ambient temperature is at or below 90°F, when the ambient temperature is above 90°F the heat generated by the condenser has nowhere to go. This causes the cooling capability of the chiller to go down.

### Airflow Diagram

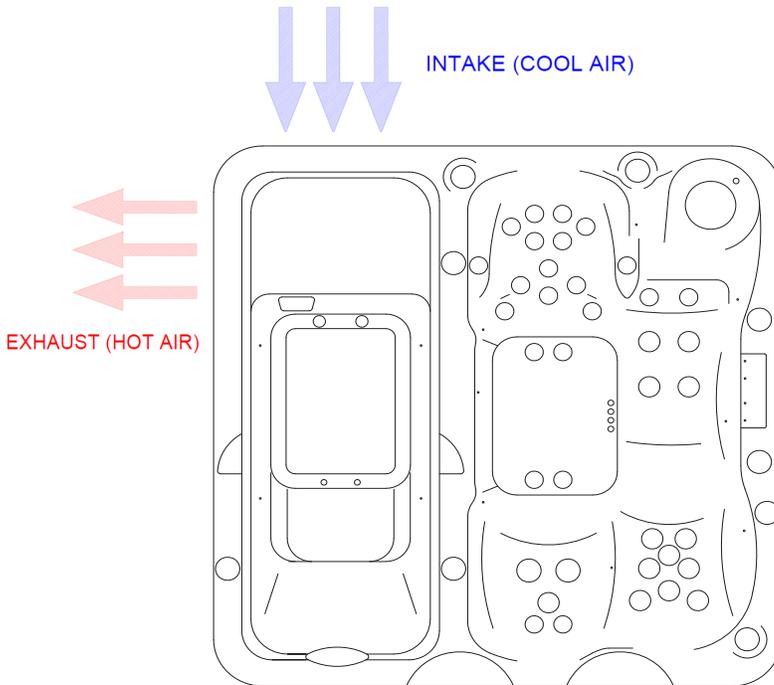

### Cooling Time

In optimal conditions the chiller can bring room temperature water to 39°F within 6-8 hours. With Chill Spas that have heating capabilities, it takes about 3-4 hrs to heat up from room temperature to reach 104°F. When water within the chill spa is cooling from 104°F to 39°F, the expected waiting time can be anywhere between 8-14 hours. This figure varies based on ambient temperature, and available ventilation.

### Summer Cooling

With any chiller or refrigeration system, when the ambient temperature is above a certain threshold, the heat generated by the refrigeration system has no where to go. This causes a problem where hot air is being used to cool down the unit when it is operating. When this occurs the water within the chill spa will still cool, but the rate of cooling is less than when the chill spa is operating in its ideal conditions below 90°F.

**Note: If the Chill Spa is filled and activated during a heatwave or a sudden hot weather event, the rate of cooling will decrease exponentially, in some cases the lowest temperature the chiller can achieve during a heatwave can be around 45-55°F after continuous operation.**

**Note: The Chill Spa is designed to maintain the cold water within the spa, if heatwave conditions are occurring the chill spa will cool the fastest during the evening/night. The chill spa may take up to 24-36hrs to properly cool when operating in summer or heatwave conditions.**

**The use of an insulated cover will help maintain the desired temperature set on the chill spa side.**


## Clearance for Service Access

While you are planning where to locate your spa, you need to determine how much access you will need for service.

All spa models require a minimum of three feet (one meter), of access to all sides of the spa for potential service. For this reason, the spa should never be placed in a manner where any side is permanently blocked. Examples include placing the spa against a building, structural posts, columns, walls, fences, or raised embankments.

If the spa is surrounded by a deck, ensure that there is easy access for service or repair. Decks should have the ability to be accessed or removed easily, some decks are built in segments for easy removal.

Spas require access in all sides in case they need service or repair. Additional service costs can be applied by the servicing dealer if a crane or additional manpower and equipment is needed to access the internals of the spa.

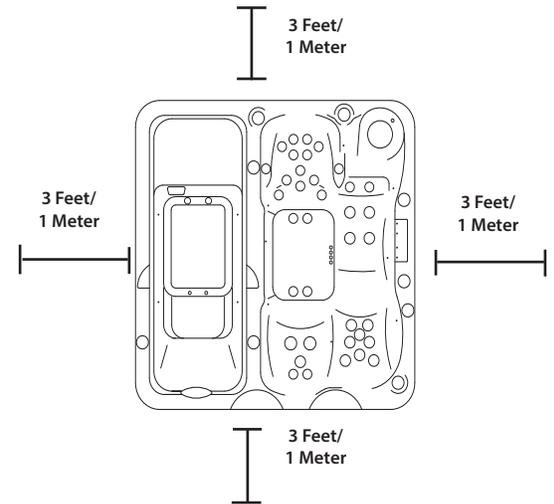

**! Never block the intake or the exhaust of the chiller, a minimum of 3 feet of clearance must be maintained in front of the intake and exhaust sides of the Dually chill side. !**

## Preparing a Good Foundation

**Note:** We strongly recommend that a qualified, licensed contractor prepare the foundation for your spa. Damage caused by an inadequate or improper foundation support such as fractures in the acrylic, shell, or collapse of the frame, are not covered by the Dually Spa warranty. It is the responsibility of the spa owner to provide a proper foundation.

The Dually Spa requires a 3-4 inch solid cement slab as a foundation to support the unit. The cement foundation must be level and free of major fractures or damage. The area that it sits on must be able to support the weight of the spa, with water, and full weight of occupants accounted for. If the foundation is inadequate, it may shift or settle after the spa is in place, causing stress that can damage the spa shell and the spa finish. We recommend placing the spa on an elevated 3-4" concrete slab. Pavers, gravel, brick, sand, timbers, or dirt is not a suitable foundation. If you are installing a spa on an elevated wood deck, or other type of structure. Consult with a structural engineer or contractor to ensure the structure can support a weight of 150 lb per square foot. If wood or other organic/inorganic porous material is used, it may lead to damage of the foundation, and harbor other issues including mold, rotting foundation, and algae. Cal Spas is not responsible for damages caused by condensation of the Chiller unit. Vinyl flooring and other synthetic materials placed on top of the concrete slab can be used at your own risk.

**\*\* Spa Appearance may Vary on Model**



# Opening the Front Panel For Electrical Access

Cal Spas are designed with innovative snap in panels and corners. In order to access the control box for electrical hook up, plumbing, or pumps inside of your spa, you will need to remove the corner panels and the front panel. The following general guide is designed to illustrate the process of removing/reinstalling any corner panel, and most side panels on various models of Cal Spas.

**\*\*The Dually spa has several snap-in panels and screw held panels, approach with care when removing panels.**



**Primary Control Box Location.**

*\*\* Spa Appearance may Vary on Model*



### Caution: Pinch Points.

When snapping panels back into place your spa, be cautious of your hand position. Avoid placing your fingers or hands over the edges of corners or panels, it may result in injury once panels lock into place.

**Before starting, make sure you wear gloves when removing any panel from your spa.**

|  |  |
|--|--|
|  | <p><b>CAUTION</b></p> <p><b>PINCH POINTS.</b></p> <p>Keep fingers, hair and loose garments clear from edges of spa panels.</p> |
|--|--|

### Caution

Begin by removing support screws from the spa corners and the panels. These can be removed using a drill or a screwdriver with a Philips #2 screw bit. Every side of the spa has support screws.



### Step 1

In order to remove the front panel, the front corners of the spa must be removed prior to removing the front panel.

**Note: Spa corners use support screws as well. Remove the screws from the corners. Do not pull on corners held down by any screw.**



### Step 2

Once the corner is removed, place aside with great care of not bending or stepping on the corner.

Repeat the removal process with the remaining corner(s) based on your service access needs.

### Step 3

Once both corners are removed, place one hand under the front panel and one hand on either corner.

Once prepared, pull both the center and your chosen corner at the same time to release the panel.

Caution: Brace for the weight of the panel once it is removed. Failure to do so can result in injury such as pinched fingers, cuts, or other injuries.

*\*\* Spa Appearance may Vary on Model*



### Step 4

Once the panel is removed, use the wooden support boards to move your panel around if needed.

**Note: Do not move your spa panel using the white clamp in mechanism.**




### Step 5

Once the front panel has been removed, your electrician or contractor may perform the necessary electrical work to power the spa.

Once the required work is completed, retrieve the panel and align the cabinet mounted plastic clamp with the bottom spa mounted plastic retainer.

**Note: In order for the panel to align, the plastic clips must be leveled with each other. If the panel is misaligned, remove and reinstall the panel.**

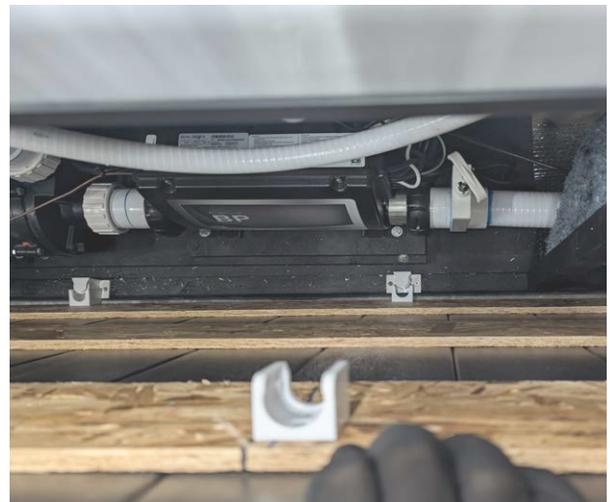

### Step 6

Once the panel is aligned, apply medium pressure to the bottom center of the panel to secure it into place. Similarly apply pressure to the top center of the panel as well. You may also use the bottom of your fist to tap the panel back into place.

**Note:** The panels are secured once you hear and feel a *thump* securing the plastic clamp together with the base.



\*\* Spa Appearance may Vary on Model

### Step 7

Upon securing the front panel, proceed with installing the corners.

Similarly to how the corners were removed, align the corner with the lip of the spa, and ensure the top of the corner is under the black weather stripping of the spa shell. Reinstall the removed screws to secure the corner in place.



This Page is Intentionally Blank



## Removing Shipping Materials



**\*\* Packaging material may vary based on model**

Your Cal Spa is wrapped with a white shrink wrap designed to protect the acrylic shell from scratches and damage. Thoroughly inspect the plastic wrapping for any tears and or damage that may have occurred during shipping. It is expected to see some scuffs or small tears at the base and corners of the spa, as the spa is pushed and shifted around in transport.

Note: Do not use a box cutter or knife to remove this plastic wrapping, if a blade is used you may cut the plastic wrapping at the bottom base of the spa, avoid slicing near the corners or the top of the spa.

## 240 Volt Electrical Installation


**NOTE:** *These instructions describe the only acceptable electrical wiring procedure. Spas wired in any other way will void your warranty and may result in serious injury. The electrical circuit must be installed by an electrical contractor and approved by a local building or electrical inspector. Failure to comply with state and local codes may result in a fire or personal injury and will be the sole responsibility of the spa owner.*

All 240V spas must be permanently connected (hard wired) to the power supply. When installed in the United States, the electrical wiring of this spa must meet the requirements of the NEC 70 and any applicable local, state, and federal codes. The power supplied to the spa must be on a dedicated GFCI protected circuit as required by NEC 70 with no other appliances or lights sharing the power. Use copper wire with THHN insulation. DO not use aluminum wire. Use the table below to determine your GFCI and wiring requirements. Wires that run over 100 feet must increase wire gauge to the next lower number. For example: A normal 50 amp GFCI with four #6 AWG copper wires that run over 100 feet would require you to go to four #4 AWG copper wires.

### GFCI Wiring Requirements for USA & Canada


| Control System  | GFCI Required | Wires Required (100ft)   |
|-----------------|---------------|--------------------------|
| IN.YE3 (2 pump) | 50 Amp        | Four #6 AWG Copper Wires |

*The spa primary control pack the is directly located in the front center of the Dually spa. The dually spa comes standard with the Gecko IN.YE.3 as its primary system. The chilling section of the spa is supplied power through the Gecko IN.YE.3 control pack, requiring only one dedicated 240 volt 50 amp GFCI circuit.*

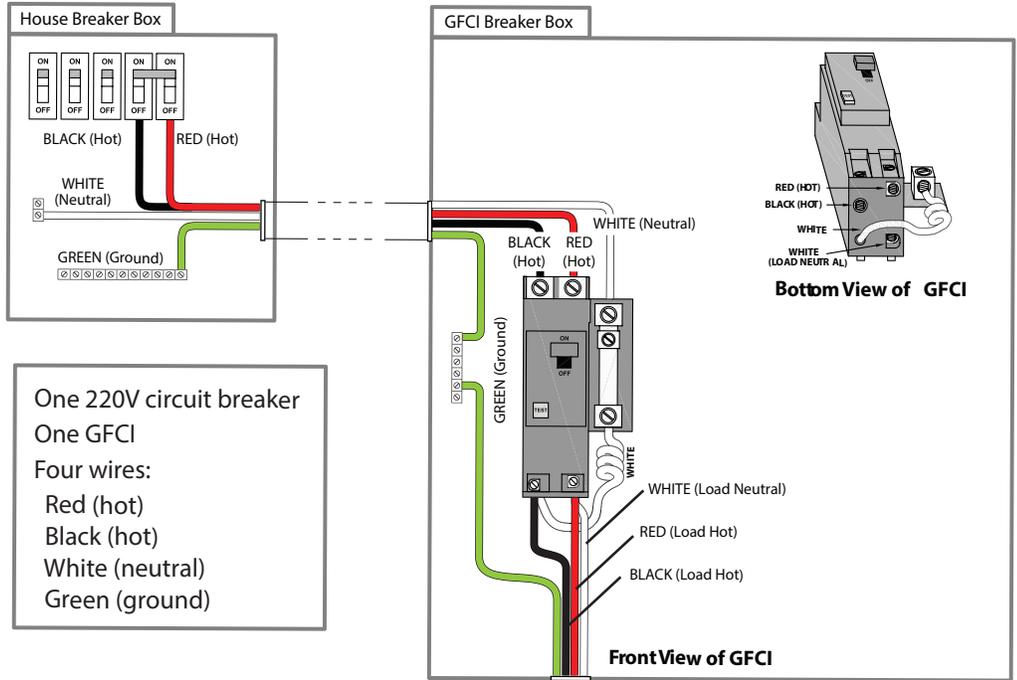

Refer to this diagram for both:

**IN.YE-5  
&  
IN.YE-3**

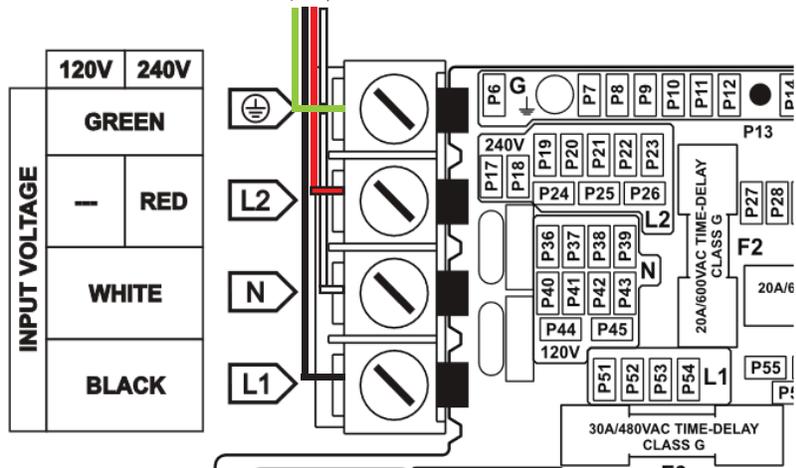

**GFCI Breaker Testing**



Before entering the spa for the first time or after each drain and refill, the spa owner must test the GFCI breaker. Electrical voltage should not be detected on the control box terminals when the GFCI is in the off position.



### Step 1. Inspect the Spa Equipment.

Inspect all plumbing connections in the equipment area of your spa.

- Make sure unions connected to the equipment pack are tight (do not over-tighten)
- If your spa has gate valves, make sure they are in the upright position.
- Make sure the drain valve is closed and capped.

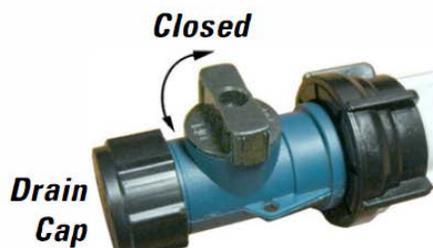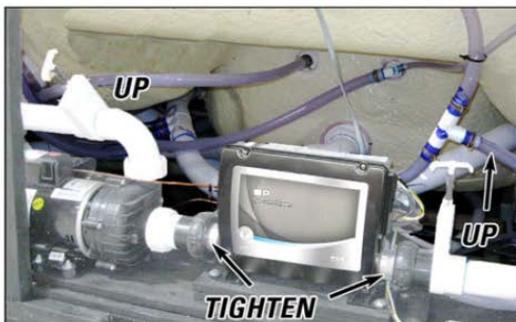

**Note:** Never run the spa with the gate valve closed or without circulating water for long periods of time.

### Step 2. Remove the Filter Cartridge.

If you have a skimmer like this:



#### Teleweir filter skimmer

- 50 square feet filtration
- Spoked cap

Rotate and remove the locking ring (Color may vary). Remove the skimmer cap and barrel, grip the filter by the handle and unscrew it from the canister. Replace and lock the locking ring and slid the skimmer cap and barrel back into the canister. Once the spa is filled you can remove the skimmer cap and barrel again to reinstall the filter.



The skimmer and barrel are locked in place during shipping with a retainer ring. The retainer ring must be unlocked and removed in order to slide the skimmer upward to remove the filter cartridge.




When removing the filter cartridge, you may remove the filter by turning it counter clockwise. The filter must be removed gently to not damage the threaded fitting inside of the filter canister.



After removing the filter, reinstall the retainer ring to the canister, then reinstall the skimmer, this skimmer must be able to move up and down with your water level. In the following step you will fill your spa with water through the filter canister.

**Step 3. Fill the Spa**

Place the water hose inside the filter canister. Fill your spa with regular tap water about six inches from the top. If the water level is too low or too high, your spa will not operate correctly.

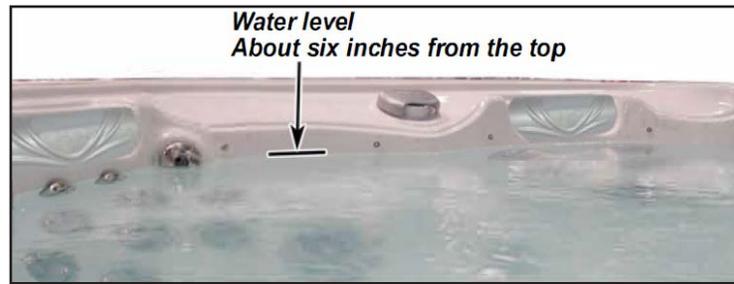**NOTE: Never fill with soft water.**

Soft water made through some home filtration systems make it impossible to maintain proper water chemistry, and may cause water foaming. This can damage the finish of the spa and void your warranty.

**You may fill your spa with well water, but only if the following preconditions are followed.**

1. Purchase and use a pre-filter that can attach to the end of a hose. This pre-filter is absolutely necessary in order to remove reactive metals and other dissolved solids that are found in well water.
2. Perform a Total Dissolved Solids (TDS) and metals test, this can be performed by a qualified person after filling up the spa, before initial use. Most Dealers and pool supply stores can perform this test.

**Step 4. Power Your Spa**

When the spa is filled to the correct level, turn on the power at the GFCI breaker (ensure that the 120V spas are connected to their dedicated proper electrical outlet.)

**Step 5. Prime the Main Pump**

The system will enter priming mode when powered up for the first time. **Priming Mode** will scroll through the display on the control panel. In this mode all devices including pumps and lights are operable, you may press the jet buttons on and off to help prime the pumps. After a few minutes the system will exit priming mode.

**Step 6.** Install filter into the filter canister



**Note:** Make sure you have removed and soaked the spa filter cartridge in a bucket of water for at least 30 minutes. This will remove air pockets inside of the filter.

When re installing the filter cartridge, do not over tighten the filter, the threaded bit inside of the filter housing is made of a corrosion resistant ABS plastic. Excessive torque will break the internal threads within the filter housing.

**Step 7.** Test and Adjust Water Chemistry

Test and adjust the water chemistry.

**Step 8.** Let the Spa Heat Up

After a period of 5-15 minutes the priming mode will finish. The heater will then activate, put the spa cover on and let the spa heat to the desired set temperature.

During the initial power up the spa, it will consume a large amount of energy to raise the water in the tub to your desired hot tub temperature. Cal Spas are designed for high efficiency, once the temperature within the spa is reached, the spa will use lower amounts of energy to maintain the temperature.

**Note:** Cal Spas are designed to retain heat, if it is desired to lower the water temperature the spa does not contain a cooling feature. To lower internal temperature of the spa, lower the set temperature on the control panel and open the tub during the evening or night to help release the heat captured within. You may also drain 1/4 of the water within and refill with new water to lower temperatures rapidly.

## Priming the Pump

New owners often have difficulty the first time they start their spa and the pumps fail to prime. This can be frustrating but these instructions should help you resolve any issues with air pockets inside of the primary pump or other priming issues.

Sometimes air can become trapped in the primary pump while filling up the spa, although this should be preventable by filling your spa through the filter basket, there is a chance that an air pocket can still form even when following the proper steps. Initially it may seem that the pump is not working, with some sound coming from the pump but no water movement.

**Note: When a pump has an airlock, continuing to operate the pump experiencing an air pocket issue can damage the pump. Do not operate the pump until this airlock issue is fixed.**

### Start Up: Priming Mode


When the spa is powered up for the first time, the spa will enter priming mode. During this mode all devices within the spa is operational. You may wait for 10-15 minutes for the heater to engage, this period of time resets when a secondary pump is activated or if the primary pump is activated for high speed.

The spa will automatically exit priming mode.

### Bleeding Air from the Pump

IF you have tried priming the pump by pressing the jet or jet 1 button on and off again with no results, you will need to bleed the pump manually.

1. Shut off power to the spa.
2. Using a philips head screwdriver, remove the front panel from the spa directly underneath the control panel, and locate the main pump.
3. Ensure that the gate valves are open
4. Place rags or towels under the plastic wet end of the pump where the spa plumbing connects into the pump
5. On the plastic wet end there will be a plastic hex headed bleeder valve that can be opened to bleed air trapped inside of the pump
6. Do not fully remove the nut, there are grooves within the nut that allows air to escape. Water will begin to trickle once the air pocket has been removed, tighten down the screw again with light torque.
7. If bleeding the pump is unsuccessful, loosen the pump unions with plumbing channel locks to remove any trapped air between the pump and the heater.
8. Turn the spa power back on and press the Jet button to prime the pump again.

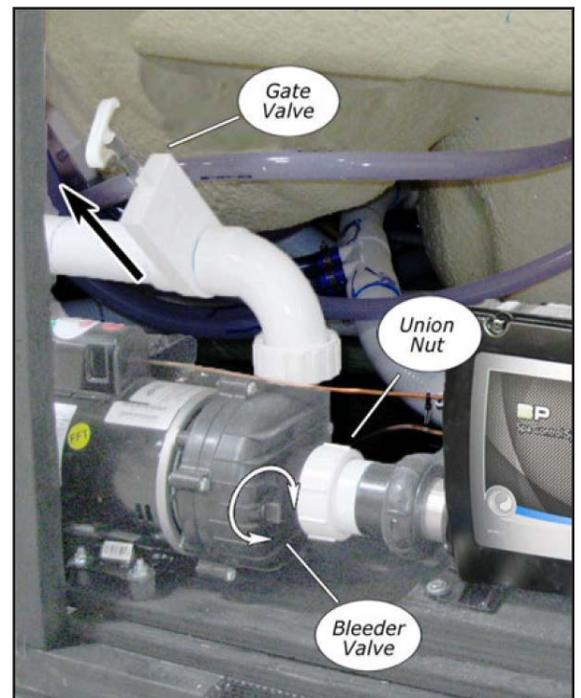



*\*\* Appearance varies based on spa model & options.*

### The ink.336 Control Panel

Your Cal Spa was designed to be controlled by the elegant and mighty ink.336 control panel. There are two variations of the control panel, depending on options inside of your spa.

The information within this section, will guide you through the menus and settings inside of the ink.336 control panel. This section also includes common error codes that can be used for reference when using your spa, and for long term spa care.

#### **General Care/Cleaning of the control panel.**

The control panel is designed with a textured vinyl plastic material, therefore when cleaning the control panel, never use abrasive materials or harsh chemicals. We recommend using a damp towel with warm water to remove any debris or stains on the buttons or screen.

## General Operation

### Start or stop accessories

To start or stop an accessory, press the associated button. Indicators will light up when the associated accessory is on. When an accessory has more than two states, press the button until it reaches the desired state. Indicators will flash when dual speed pumps are on at low speed, and will be solid at high speed.

If you have a blower it will be controlled by the **Pump 2** key. The order of actions is as follows: pump 2 on; pump 2 high speed (if applicable); blower on; pump 2 off; blower off.



### Water temperature

The temperature shown on screen is the current water temperature. Use the **Up** and **Down** buttons to set the desired temperature.

The set point icon will appear at the top of the screen. After 3 seconds without any change to the set temperature value, the keypad will resume the normal display.



### Off Mode

Pressing Pump 1 for 5 seconds will enable the Off mode. This mode allows you to stop all outputs including automatic functions such as filter cycle, heat request and smart winter mode for 30 minutes to perform quick spa maintenance. When Off mode is active, the display will toggle between the "OFF" message, the clock and the water temperature. Press Pump 1 or Pump 2 (if available) to restart the system before the expiration of the 30 minute delay. When the system resumes its normal operation, the display shows "On" for 3 seconds.

## Panel Lock



### Keypad Lock

*(Available only if the lock feature is enabled in the spa controller configuration)*

You can lock the keypad by selecting one of 2 security levels: *Partial* or *Full*. The *Partial* level locks the set point adjustment and many options in the settings menu. The *Full* level locks all keypad functions.

### Partial lock activation

Press both arrow keys simultaneously for 5 seconds. The keypad will display "LocP". Release both keys to engage *Partial* lock.

### Full lock activation

Press both arrow keys simultaneously for 5 seconds. The keypad will display "LocP". Keep pressing both arrow keys for 5 more seconds (10 seconds total). The keypad will display "LocF". Release both keys to engage *Full* lock.

To unlock the keypad (either *Partial* or *Full*), press and hold both arrow keys for 5 seconds; the "uLoc" message will be displayed for a few seconds as a confirmation.



## Custom key

This key is available for 1-pump systems only. It is also available only if the spa controller configuration uses a functionality related to the **Custom** key.

The following functions are available on this key:

- *Quick On Off*
- *Soak*
- *Auxiliary output*
- *Off*
- *Manual Economy*

A short press on the **Custom** key will turn on or off the selected mode in the list.

### Quick On Off

This function allows you to shut down all the active user demands (pump and light) by a key press and resume their state by another press.

Activating or deactivating *Quick On Off* mode with the **Custom** key will have no special message being displayed.

### Soak

This function allows you to soak in silence in the spa. When enabled, *Soak mode* stops all pumps activated by the user as well as the filtration and Smart Winter Mode cycles for 30 minutes.

Water temperature regulation remains active as well as circulation pump if it is configured as "Always On". While *Soak mode* is engaged, the display toggles between the "Sby", the time and the water temperature. The display will show "On" for 3 seconds upon exit of *Soak mode*.

### Auxiliary output

It allows you to control an auxiliary output. When the control of the Auxiliary is selected by the **Custom** key, "AUX" blinks on the display. Then, the Auxiliary can be turned On or Off by another press on the **Custom** key. When the Auxiliary output is being turned on, the display shows "On" for 3 seconds. When the Auxiliary is being turned off, the display shows "OFF" for 3 seconds. Auxiliary output will be turned off automatically after 20 minutes if it is not done manually. Note that your spa controller can be configured with a different timeout.

### Off

*(Described previously in this document)*

### Manual Economy

This mode allows you to lower the temperature set point of the spa by 20 °F (11 °C). When the Economy mode is ON, the display toggles between the "Eco" message, the time, and the water temperature. The display will show "noE" for 3 seconds upon exit of *Economy mode*.



### Program menu

*Instructions listed in this section assume the Program key is used, but if there is no Program key on the keypad, use the Light key instead.*

The program menu is accessible by holding down the **Program** key for 5 seconds. In the program menu the following parameters can be set: clock, filter or purge cycles, economy mode, heat pump mode and temperature units. While in the program menu, use the **Up** or **Down** key to adjust the parameters and use the **Program** key to jump to the next parameter. The changes will be saved after the confirmation of the last parameter only.

If there is no action taken for 15 seconds, the system will exit the program menu and all changes will be saved.



### Setting the clock

Enter the program menu by holding down the **Program** key for 5 seconds. The display will show the current clock setting with the hour flashing.

Depending on factory settings, your system may be set to 24-hour time or 12-hour time. An additional dot can be lit under the ":" separating hours and minutes to serve as an AM icon.

**Setting the hour:** Use the arrow keys to adjust the hour. Press the **Program** key to jump to the next parameter, the minutes.

**Setting the minutes:** Use the arrow keys to adjust the minutes. Press the **Program** key to jump to the next parameter, the filter or purge start time (FS).

### Programming the filter/ purge cycles

Depending on system configuration, your spa will perform either a filter or a purge cycle. The filter cycle menu consists of the following parameters: the start time (FS), the duration (Fd) and the frequency (FF). The purge cycle menu consists of the following parameters: the start time (FS) and the frequency (FF).

A filter cycle consists of starting all the pumps and blower in high speed for 1 minute (purge step) then, the pump associated with the filter will run in low speed for the remaining duration of the filter cycle (clean step).

A purge cycle is used when the spa is equipped with a 24 hour circulation pump which provides a continuous clean step. It consists of starting all the pumps and blower in high speed for 1 minute.

## Setting Filtration Cycle



### Setting filter or purge cycle start time

The display will show FSxx, "xx" representing the starting hour of the cycle. Use the arrow keys to adjust the hours. Use the **Program** key to jump to the next parameter, filter duration (Fd).



### Setting filter cycle duration

(not available on purge systems)

The display will show Fdxx, "xx" representing the duration in hours of the filter cycle. Use the arrow keys to adjust the duration. Use the **Program** key to jump to the next parameter, filter or purge frequency (FF).

0 = no filtration

24 = continuous filtration

It is not recommended to set this to "0".



### Setting filter or purge cycle frequency

The display will show FFxx, "xx" representing the number of cycles per day. Use the arrow keys to adjust the frequency. Use the **Program** key to jump to the next parameter, economy mode (EP).

☼ The "Filter" indicator lights up when filter is on and flashes when suspended.

## Economy Mode



### Setting economy mode\*

This mode allows you to lower the temperature set point of the spa by 20 °F (11 °C) during a certain period of the day.

The display will show EPx, "x" representing the state of the programmed economy (0 = disabled, 1 = enabled).

Use the arrow keys to enable or disable economy mode.

Use the **Program** key to jump to the next parameter, economy start time (ES). When the Economy mode is ON, the display will toggle between the "Eco" message, the time, and the water temperature.



### Setting economy start time\*

The display will show ESxx, “xx” representing the hour at which the economy mode will become active. Use the arrow keys to adjust the hour. Use the **Program** key to jump to the next parameter, economy duration (Ed).



### Setting economy duration\*

The display will show Edxx, “xx” representing the duration in hours of the economy mode. Use the arrow keys to adjust the hour. Use the **Program** key to jump to the next parameter, heat pump regulation mode.

24 = continuous economy

## Additional Programming



### Setting temperature unit

Water temperature can be displayed in either Fahrenheit (°F) or Celsius (°C). The display will show °F or °C.

Use the arrow keys to change the setting.  
Use the **Program** key to save all the parameters.



### Smart Winter Mode

Our Smart Winter Mode protects your system from the cold by turning pumps on several times a day to prevent water from freezing in pipes.



The “SWM” indicator lights up when freezing is detected and flashes when the purge is active.

## Additional Programming



### Setting temperature unit

Water temperature can be displayed in either Fahrenheit (°F) or Celsius (°C). The display will show °F or °C.

Use the arrow keys to change the setting.  
Use the **Program** key to save all the parameters.



### Smart Winter Mode

Our Smart Winter Mode protects your system from the cold by turning pumps on several times a day to prevent water from freezing in pipes.

 The “SWM” indicator lights up when freezing is detected and flashes when the purge is active.

### Cooldown

After heating the spa water to the desired Set Point, the heater is turned off, but its associated pump (Pump 1 low-speed or CP) remains on for a predetermined period of time to ensure adequate cooling of the heating element, prolonging its useful life.



### Water temperature regulation

Every 15 to 90 minutes the pump will run to ensure accurate water temperature readings as well as avoid heater activation in dry conditions. After verifying pump activation and taking a water temperature reading if required, the system automatically turns the heater on to reach and maintain water temperature at Set Point.

 Indicator flashes when taking water temperature reading.

## Error Messages

The list below shows the different error messages that can appear on the home screen. Refer to the troubleshooting and error codes section of the TechBook for your spa control for more details.

| <b>Code</b>     | <b>Description</b>   |
|-----------------|--|
| HL              | Warning! HL Error  |
| FLO             | No flow for more than 2 hours  |
| FLO             | No flow condition  |
| OH              | Warning! Spa temp. high  |
| Prr             | Warning! Temp. probes defective  |
| AOH             | Internal pack temp. high   |
| UPL             | The spa control does not have valid software. Please insert valid in.stick to reprogram spa control. |
| CoE             | Keypad not communicating with spa control  |
| Erl             | Slave spa control not detected   |
| HPxx (01 to 99) | Heat pump error. See in.temp techbook  |

This Page is Intentionally Blank



## Control Panel



### Quick Reference

**TEMP :** The temp button works to navigate and set the temperature of the Chill Spa. Hold the button for 2 seconds and it will flash the current set temperature. Once this appears on screen you can use the **“Temp”** and **“Time”** buttons to raise or lower the chillers temperature target. *Note that the chiller side of this spa does not have the ability to warm up.*

**Time:** The time button is a dual function button, used to adjust the time and to navigate through options. To set the time hold the button for 2 seconds, the display will show **“12:00”** once this appears you may use both the **“Temp”** and **“Time”** button to adjust the time.

**Light:** Switches perimeter and internal lights on. Pressing the button repeatedly will cycle different modes, these modes include strobe, slow transition, fast transition, and “rave” mode. Repeated presses afterward will allow you to select a solid color of your choice. Starting from Red, Green, Blue, Yellow, Aqua, Orange, Violet, and White.

**Set:** This is used to select and to confirm temperature or options.

# Setting Temperature and Time

**This Chill Spa is equipped with a SmarTouch Control System**

SmarTouch Digital comes to you with a universal set of default settings. If you choose to keep these settings, then you only need to remember 2 things: how to set the spa temperature and to press the SET key whenever you are done using the spa.

## Setting Temperature

Both buttons are used to select, increase or decrease temperature or time setting.

The **UP(TEMP)** & **DOWN(TIME)** arrows.

*Note: Both keys are active when pressed individually and held down 2 seconds, to eliminate accidental changes.*



Press and hold for 2 sec. the UP (TEMP) arrow key.



Controller will display current spa temperature. Use the UP or DOWN arrow keys to select desired temperature.



\*To enter new temperature press → SET key.

The controller will:

- Lock-in the new temperature.
- Display current spa temperature.

**IMPORTANT:** Always turn down the heat before you drain the spa.

\*Note:

If no buttons are pressed, the screen will reset within 30 seconds, the controller reverts to the previous setting, and the change will not take effect.

## The SET Key

After using the spa, press the SET key to tell the micro controller you are done using the spa. It will then take over the spa's management, including the different filtration cycles, heat maintenance, economy modes and protection against freezing.

# Setting Temperature and Time

## SETTING TIME-OF-DAY

### Setting Time-Of-Day

Press and hold for 2 sec. the DOWN (Time) arrow key. 

Controller will display 12:00 noon. Use  OR  to set the correct time-of-day.

\*After every selection "Hours , Minutes" press → SET key. 

### Cool-Down Timer

A 30-second timer keeps the low speed jets, ON, after the heater turns OFF, to remove all residual heat from the heater element.

### User Timer

A built-in, 20 minutes elapsed-time clock switches off any active function.

## Filtration

The Chill Spa is equipped with a low amperage 24hr circulation pump. The spa will always be filtering at a low flow rate whenever the Chill Spa is not in use. The programming option for the spa will appear in the settings as FP1-FP4 but they will NOT apply for the Chill Spa.

## Vacation Mode

### Start Time:

- Press the DOWN arrow and SET keys together at the same time. Code FP1 is displayed.
- Press the UP arrow 2 times and proceed to code "Hibr" then press SET. Using the UP or DOWN arrow keys change the start time if you choose to. Press SET to enter the hours and SET again to enter the minutes. Default start time is 12:00 noon.
- Once you have set the start time press the UP arrow to continue with the procedure to set the duration.

### Duration:

- Proceed and press the UP arrow 5 times to code "Hibr" then press SET to extend the duration or filtration time from 60 minutes up to 240 minutes then press SET.
- Press the UP arrow button 8 times and proceed to code SEND. Press SET to exit and to save the new settings. The controller will default to the new settings.
- If power is turned off or interrupted the new settings are not affected, however the controller will exit vacation mode and reverts to the standard or original settings once power is re stored.

# Additional Programming

## Flip Screen

The display on the control panel of the chill spa can be flipped to be controlled from the inside of the spa. To flip the display press the  button and the **"SET"** button at the same time. To flip it back press the same two buttons together again.

## Menu Navigation

The control system inside of the Chill Spa has several menu options that do not apply to the operation of the chill spa. This is due to the construction and design of the chill spa. If accidental activation of an option occurs, you can use the  key to find option **"CAnC"** and press set to revert to previous settings. you may also wait until the display times out and return to its default temperature display.

**The Unused software settings include: FP1, FP2, FP3, FP4, FP1d, FP2d, FP3d, FP4d, CLdn, ECL, CHCL, Uto, PUF, and CALb.**

Many of these modes do not apply for the Chill Spa: If accidental activation occurs scroll to the CAnC option and press set to cancel any modifications done.



## WIFI - Connectivity (option)

**Connecting the Chill Spa:** The Chill side has the ability to connect to a residential local wifi network. If the Spa was purchased with the optional ACC wifi module. This module allows you to adjust the spa temperature, activate the LED lights and check the current temperature of the water. The module is already connected from factory and will require a quick set up.


The spa may need to be powered down at the breaker or its own GFCI, and powered back up to go back into discovery mode.

Download the “SmarTouch Digital” app from the App Store or Google Play store.

- It is very important to ensure you have strong wifi signal available from your preferred wireless router. Test your wifi router’s signal strength with your mobile phone or tablet while standing right next to the spa and right next to the wifi module installation location. **This device does NOT support the 5 ghz spectrum** due to range limitations that exist within that spectrum. The 2.4GHz spectrum is more reliable over greater distances. If you have a lot of devices sharing your network, it’s important to connect as many wireless devices using your network, that are 5ghz capable, to that spectrum instead of the 2.4GHz spectrum. The more devices sharing 2.4Ghz the slower that spectrum performs. An overloaded network in the 2.4Ghz spectrum will cause connectivity issues and result in unreliable remote access to your spa.


1. First disconnect and reconnect your Spa, this will send the module into a temporary discovery mode. Make sure both Bluetooth and Wifi are turned on inside your mobile device.

**1**

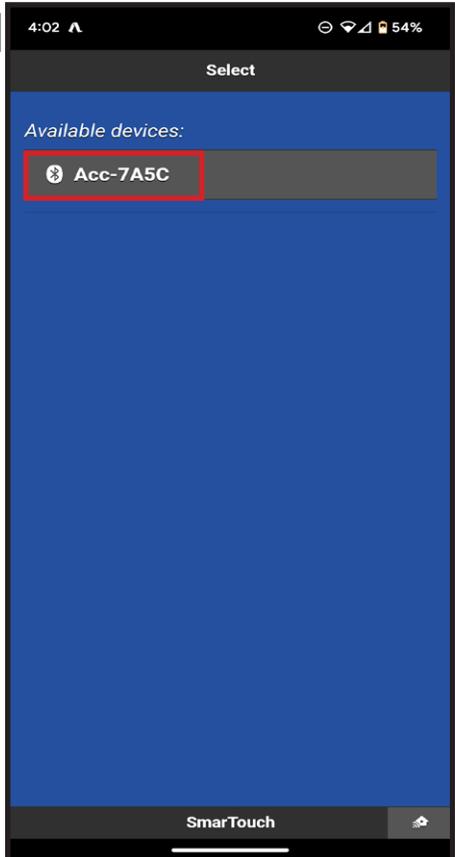

2. Observed networks will appear. the name of the module would be ACC-XXXX or ESP32. Select it and name the network with a password pin of your choice.


**2**

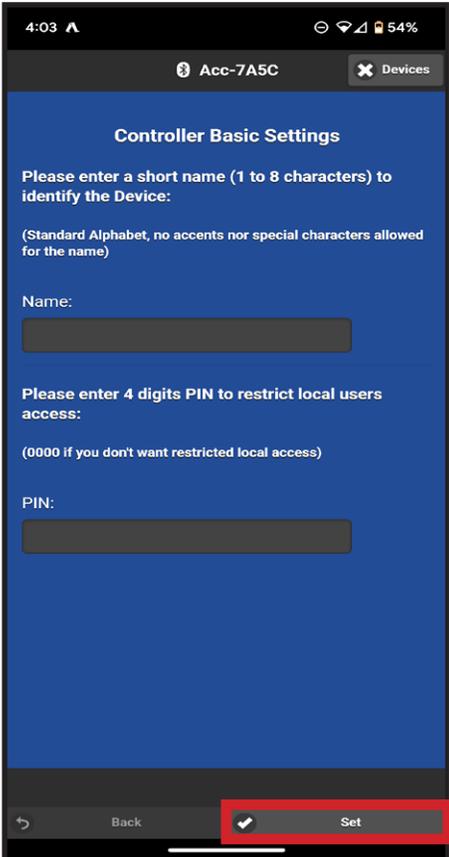

3. Once the name and pin have been created, tap the “SET” option at the bottom of the screen.

# WiFi - Connectivity

3

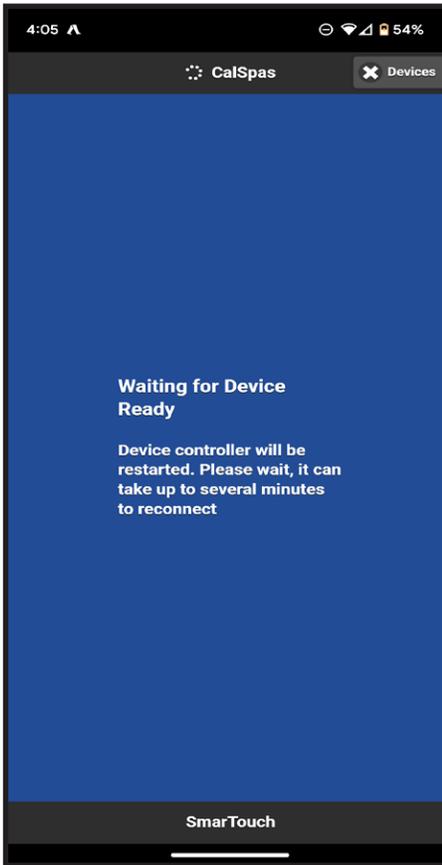


3. Once "waiting for device" appears, in about 1 minute the temperature of the spa will show on your display.

4




4. The screen will show two buttons for the Light and Set options. The device is currently communicating with your phone via Bluetooth. The next step is to connect it to your local network. To begin select "Config"

5

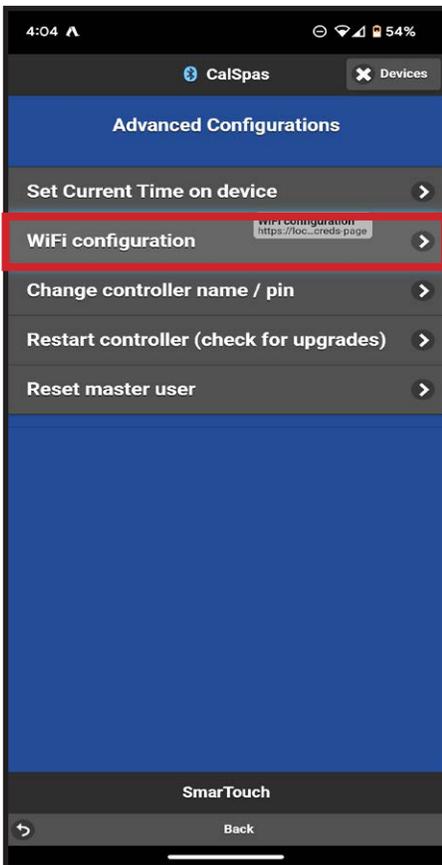

5. Once config is selected it will send you to an options menu. Select "WIFI Configuration" to select your network.


6

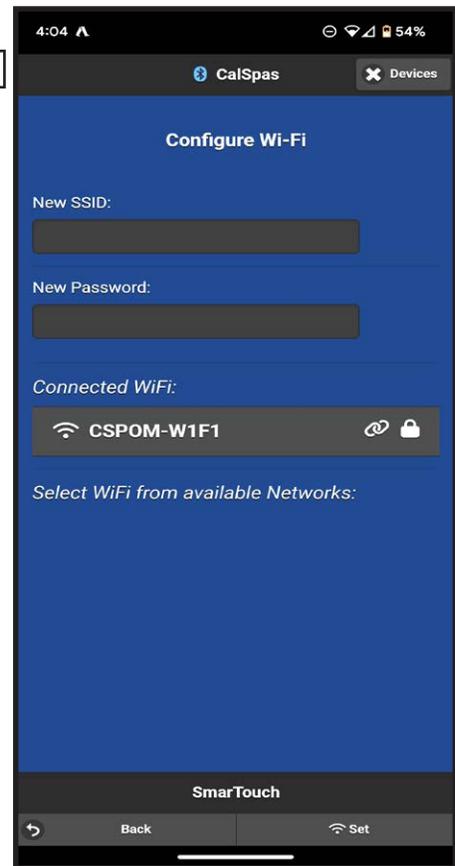

6. You can select from your "connected wifi" if the mobile device is already connected to wifi. you may also type in the SSID of your wifi with its password to manually connect the module.

# WiFi - Connectivity

7

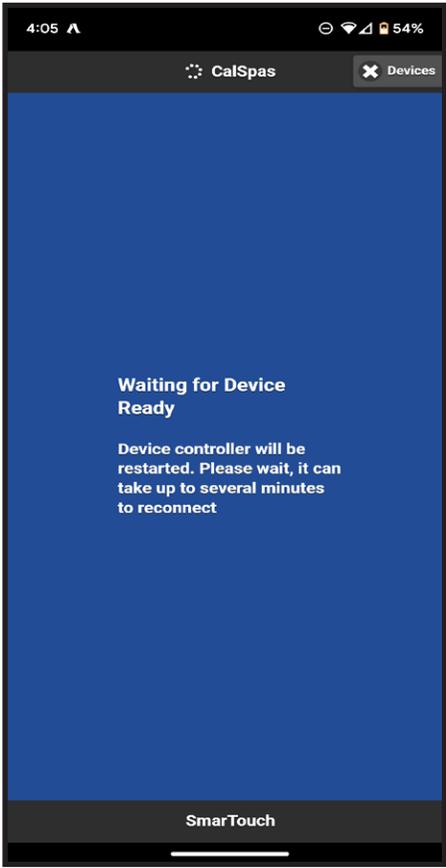

7. Once a network is selected it will return to its pairing screen. this process can take up to 5 minutes. Time needed to finish pairing varies based on router signal strength, number of devices on the network, and available network bandwidth.

8

8. The wifi module is now paired. The green signal icon will appear on the top of the screen.





## LED Lighting

Press the "Light" button on the controller to turn the spa light on. If your spa has optional perimeter LED lights, they will also activate.

1. **Cycle:** When you press the "Light" button on and off repeatedly the LED will cycle between a variety of colors that the RGB light can support. Each time you press the button it will immediately advance to the next color in sequence and will eventually enter different light pattern modes.
2. **Flashing:** Once you have cycled through all of the colors, another press of the "Light" button will produce a flashing pattern.
3. **Fading cycle:** The next phase of operation when you push the LIGHT button is a slower and/or fast fade random transition from one color to the next.
  - If a spa is equipped with more than 10 points of light the slow fading cycle will flicker during a color change.
  - If your spa is built with a waterfall, it uses 4 points of light. Spas with exterior LEDs work in the same mode as described above. The variations in color and patterns provide you multiple customization options.

## Diverter Knobs

Diverter knobs are 1" and 2" knobs located around the top of your spa. They allow you to divert water through jets from one side of the spa to the other, of in most cases from floor jets to all jets. This is accomplished by rotating the diverter knob to the left (counter-clockwise), decreasing the amount of water flow through a section of jets. To increase the amount of water flow through the other section of jets, rotate the handle to the right (clockwise)



## Air Venturis

Air venturis are the 1" knobs located around the top of your spa. Each one will let you add a mixture of air with the jet pressure. This is accomplished by rotating the air venturi knob to the left (counter clockwise) to increase the amount of air flow. To decrease the amount of airflow through the jets, rotate the handle to the right (clockwise)



## Waterfall (option)



Some Cal Spas are equipped with a waterfall feature, with LED lights inside the housing. The flow of the waterfall water can be adjusted in most spa models by turning the primary water diverter inside of your spa.

Almost all of the jets in your spa are adjustable. Rotating the jet face clockwise will increase water pressure, and counter clockwise to reduce pressure on that specific jet. Neck jets are the opposite, with clockwise movement to decrease force, counter clockwise to increase.



## Electrical Power Efficiency Tips

Your new spa comes equipped with a 5.5kWh electric heater. Follow the directions listed below, it will help ensure the most efficient spa operation. This information is relevant to spa owners with the standard 5.5 kWh heater.

Note: This method is only for spa usage under two hours a week.

- Keep the spa operating temperature about 5F below your usual preferred temperature when not in use. Raise the temperature to your preferred temp about one or two hours before you enter the spa to save on energy costs if your usage is within the range of two hours per week.
- If you use your spa more than two hours a week total, keep the set temperature at your desired temperature.
- The air venturis should be used sparingly when open, water temperature drops depending on ambient temperature as this air is now being injected into the water.

Allowing the water temperature to lower more than 10F below the desired usage temperature, and reheating it prior to usage, will cause the heater to operate longer than keeping the spa about 5F below. This will increase your operating costs. We recommend getting your spa up to your desired temperature, and then lowering the set temperature by 5F once its reaches the desired temperature. Our spas are designed to retain as much heat as possible to ensure your save on long term costs.

\*Note: The most electrical power is consumed in the initial fill up, as the tap water needs to be brought up to hot tub temperatures.

## Water Clarity

This section is intended for new spa owners who are not familiar with adjusting spa water chemistry. Everyone's knowledge with maintaining water quality is different, but there are some general concepts you need to know.

Water maintenance is not difficult, however it is something that requires regular attention. The most important thing to understand about taking care of your spa water, is that preventative action is easier than corrective action when balancing chemistry and maintaining water clarity.

Before beginning, we recommend you become familiar with some water quality terms and their definitions within this following section.

### 1. Chemical Balancing

#### **Learning how to properly balance your water.**

You will need to test and adjust the chemical balance of your spa water, this is not a difficult task but it must be done regularly. Important areas to focus on with water chemistry is the calcium hardness, total alkalinity, and the pH range.

Spa owners with salt generators will need to perform a total dissolved solids and phosphate test. This must be done before dissolving salt into the water.

### 3. Filtration

#### **Learn how to properly clean your filter**

Cleaning your filter cartridge is the easiest and most effective thing you can do to keep your spa water clear.

A clogged dirty filter will cause the heater and pump to work harder than they need to, possibly causing them to fail.

The spa's heating system will only function with the proper amount of water flow through the system.

### 2. Sanitation and Shock

#### **Learning how to properly sanitize and shock your spa.**

Sanitizers kill bacteria and viruses and keeps your water clean. A low sanitizer level will allow microbes to grow quickly in the spa water. We recommend using either granulated chlorine or bromine as your sanitizer.

You also need to add shock to the water to stimulate the chemical sanitizer. How much you use and how often you use sanitizers, depends on how frequently the spa is used.

### 4. Consistency

#### **Make checking your spa part of your daily routine.**

Clear water requires regular maintenance. Establish a routine based on a regular schedule, testing your water on a daily basis.

Maintaining your water quality helps the enjoyment of your spa and extends the lifetime of spa components by preventing damage from neglect and chemical abuse.

The following chemical terms are used in this section. Understanding their meaning will help you to better understand clear water maintenance. Words in bold type are defined in this table.

|                               |  |
|-------------------------------|--|
| <b>Bromine / Bromamines</b>   | <p><u>Bromine</u> is an efficient sanitizer chemical for spas. When used as a <b>sanitizer</b>, bromine forms compounds called bromamines. Bromine can be added to the spa or automatically generated.</p> <p><u>Bromamines</u> are compounds formed when bromine combines with nitrogen from body oils, perspiration, etc. Unlike chloramines, bromamines have no pungent odor and are effective sanitizers.</p>  |
| <b>Chlorine / Chloramines</b> | <p><u>Chlorine</u> is an efficient sanitizing chemical for spas. We recommend using sodium dichlor-type granulated chlorine because it is totally soluble and nearly <b>pH</b> neutral. When used as a <b>sanitizer</b>, chlorine forms compounds called chloramines.</p> <p><u>Chloramines</u> are compounds formed when chlorine combines with nitrogen from body oils, perspiration, etc. Chloramines can cause eye irritation as well as having a strong odor. Unlike <b>bromamines</b>, chloramines are weaker, slower <b>sanitizers</b>. To remove chloramines, see the description of <b>shock</b> below.</p> |
| <b>Calcium Hardness</b>       | Abbreviated as CH. Calcium hardness is a measure of the total amount of dissolved calcium in the water. Calcium helps control the <b>corrosive</b> nature of the spa's water and is why soft water is not recommended. The low CH level can cause <b>corrosion</b> to the equipment and can cause staining of the spa shell.   |
| <b>Corrosion</b>              | The gradual wearing away of metal spa parts, usually caused by chemical action. Generally, corrosion is caused by low <b>pH</b> or by water with levels of <b>TA, CH, pH</b> or sanitizer which are outside the recommended ranges.  |
| <b>Dichlor</b>                | Also called sodium dichlor. It is a type of chlorine and is frequently used when <b>shocking the water</b> . An effective <b>chlorine</b> -based powdered <b>oxidizer</b> and <b>sanitizer</b> . Dichlor works by oxidizing waste product in the water such as <b>bromamines</b> and <b>chloramines</b> and causing them to burn off.  |
| <b>Monopersulphate or MPS</b> | Frequently used when <b>shocking the water</b> . An effective non-chlorine-based powdered <b>oxidizer</b> that works well with both <b>chlorine</b> and <b>bromine</b> . It works by oxidizing waste product in the water such as <b>bromamines</b> and <b>chloramines</b> and causing them to burn off.   |
| <b>Oxidizer</b>               | <b>Shocking the water</b> with an oxidizing chemical prevents the buildup of contaminants, maximizes <b>sanitizer</b> efficiency, minimizes combined <b>chlorine</b> and improves water clarity.   |
| <b>Ozone</b>                  | Ozone is a powerful oxidizing agent which is produced in nature and artificially. Ozone forms no by-products of <b>chloramines</b> (ozone actually oxidizes chloramines) and will not alter the water's <b>pH</b> .  |
| <b>pH</b>                     | The pH level is the measure of the balance between acidity and alkalinity. Low pH causes the water to be too acid, which will cause <b>corrosion</b> , whereas high pH causes the water to be too alkaline, which will cause <b>scaling</b> . See page     for testing for and balancing pH.   |
| <b>ppm</b>                    | The abbreviation of "parts per million", the standard measurement of chemical concentration in water. Identical to mg/l (milligrams per liter).  |
| <b>Sanitizer</b>              | Sanitizer is a chemical added to the water to kill bacteria and viruses and keep the water clean. The two sanitizers we recommend are <b>chlorine</b> and <b>bromine</b>   |

**Scale**

Rough calcium-bearing deposits that can coat spa surfaces, heaters, plumbing lines and clog filters. Generally, scaling is caused by mineral content combined with high **pH**. Additionally, scale forms more readily at higher water temperatures.

**Shock**

Also called shocking the water, shock treatment, or superchlorination. Shocking the water is adding significant doses of **dichlor** or **MPS** to **oxidize** non-filterable organic waste and to remove **chloramines** and **bromamines**. Shock treatment breaks down organic waste contaminants which cause odor and cloudy water.

**Total Alkalinity**

Abbreviated as TA. Total alkalinity is the measure of the total levels of carbonates, bicarbonates, hydroxides, and other alkaline substances in the water. TA is important for **pH** control. If the TA is too low, the **pH** will fluctuate out of control, and if it is too high, the **pH** becomes difficult to stabilize.

**Trichlor**

Used as a pool **sanitizer**. NEVER use trichlor in a spa. Trichlor is extremely acidic and will lower the **pH**, causing corrosion to equipment. Using trichlor will void your warranty.

## Water Testing Methods

There are two testing methods to choose from:

Test strips are a convenient testing method commonly used by spa owners.



The reagent test kit is a method which provides a high level of accuracy but is more expensive and more difficult to use if not experienced with this testing method.



## Adding Chemicals to the Spa

**IMPORTANT:** All spa water chemicals, including MPS (Shock), chlorine, granulated pH increaser or decreaser, granulated total alkalinity increaser, calcium hardness increaser, liquid stain and scale inhibitor, and liquid de-foamer must always be added into or in front of the filter compartment while the primary jet is running for a minimum of 10 minutes.

1. - Fold back the cover.
2. - Press the Jets button or Jet 1 button (Touch devices, activate pump 1)
3. - Carefully measure the recommended amount of chemical and slowly pour it into the filter area. Use care not to splash chemicals on your hands, clothes, eyes, or spa surface/siding
4. - Close the spa cover

**Warning:** High sanitizer levels can cause discomfort to the user's eyes, lungs, and skin. Always allow the sanitizer level to fall into the recommended range before using the spa.

**IMPORTANT NOTE REGARDING SHOCK TREATMENT:** After administering shock to your spa, leave the cover open for a minimum of 20 minutes to allow the oxidizer gas to vent into the atmosphere. A high concentration of trapped oxidizer gas which may exist as a result of the shock treatment (not daily sanitation) may eventually cause discoloration or vinyl degradation to the bottom of the cover. This type of damage is considered chemical abuse and is not covered under the terms of the limited warranty.

Maintaining spa water chemistry can be tricky, especially since there are many methods of keeping your water clear and clean. Note: We do not recommend a specific brand of chemicals.

See a spa dealer for guidance and recommendations on spa chemicals and supplied needed, as water chemistry varies from region to region. Various chemicals often sold under brand names, but a spa dealer can advise you on generic chemicals that are often less expensive than proprietary brands.

## Balancing the Total Alkalinity (TA)

Total Alkalinity is a measure of the total levels of carbonates, bicarbonates, hydroxides, and other alkaline substances in the water. TA is referred to as the water's "pH Buffer". In other words it's a measure of the ability of spa water to resist chemical changes in the pH level.

If the TA is too low, the pH level will fluctuate widely from high to low. Fluctuations in pH level can cause corrosion or scaling of the spa components. Low TA can be corrected by adding sodium carbonate (pH/Alkalinity Up).

If the total Alkalinity is too high, the pH level will tend to be high, and may be difficult to bring down. It can be lowered by using sodium bi-sulfate (pH/Alkalinity Down).

Once the TA is balanced, it normally remains stable, although the addition of more water with a high or low alkalinity will raise or lower the TA reading of the water.

When the Total Alkalinity is within the recommended range. Proceed to the next step.

## Balancing the Calcium Hardness (CH)



Calcium Hardness is a measure of the total amount of dissolved calcium in the water. Calcium helps control the corrosive nature of spa water, that's why Calcium - low water (Soft Water) is not recommended. It is very corrosive to the equipment and can cause stains in the spa shell.

If the CH is too high (Hard Water) formation of scale on the spa shell & surface can result. You can use a generic calcium remover to remove hardness from water. CH can also be decreased by dilution (75% Hard water, 25% Soft water) will usually yield a reading within the correct range. If soft water is not available or practical for you, a stain and scale inhibitor should be added to the spa water, according to label instructions.

If the CH is too low, add CH Increaser.

Once the CH is balanced, it normally remains stable, although the addition of more water with a high or low calcium content will raise or lower the CH reading of the water.

When the CH is within the recommended range proceed to the next step.

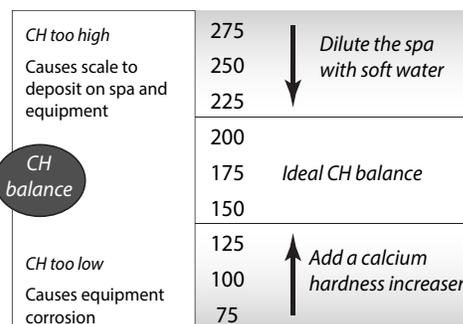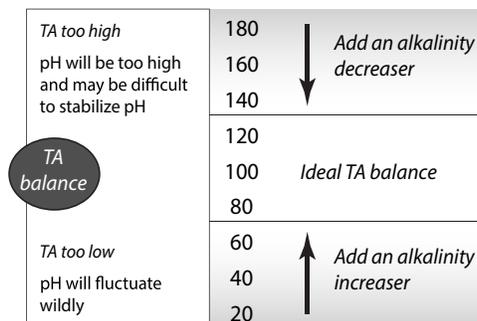

## Balancing the pH

The pH level is the measure of acidity and alkalinity. Values above 7.8 are alkaline; those below 7.2 are acidic. Maintaining the proper pH level is extremely important for optimizing the effectiveness of the sanitizer, maintaining water that is comfortable for the user, and preventing equipment deterioration.

If the spas water's pH level is too low, the following may result:

The sanitizer will dissipate rapidly

- The water may become irritating to spa users
- The spas equipment may corrode
- Bacteria and algae spikes can occur.

If the pH is too low it can be increased with sodium hydrogen carbonate (pH/Alkalinity Up) to the spa water.

If the pH level is too high, the following may result:

- The sanitizer is less effective
- Scale will form on the spa shell surface and equipment
- The water may become cloudy
- The filter cartridge may become obstructed.

If the pH is too high, it can be decreased by adding sodium bi-sulfate (pH/Alkalinity Down) to spa water.

**Note: After adding sodium hydrogen carbonate or sodium bi-sulfate, wait two hours before testing the spa water again for pH. Compounds take time to fully dissolve into the spa water, initial reading may not be accurate**

Its important to check the pH on a regular weekly basis. The pH will be affected by the bather load, the addition of new water, the addition of various chemicals, and other sanitizer used. When the pH is within the recommended range, proceed to begin the sanitation process.

|   |     |                            |
|---|-----|----------------------------|
| pH too high<br>Too alkaline, causes scaling | 8.2 | ↓<br>Add a pH<br>decreaser |
|   | 8.0 |                            |
| 7.8   |     |                            |
| pH<br>balance                               | 7.6 | Ideal pH balance           |
|   | 7.4 |                            |
|   | 7.2 |                            |
|   | 7.0 |                            |
| pH too low<br>Too acidic, causes corrosion  | 6.8 | ↑<br>Add a pH<br>increaser |
|   | 6.6 |                            |
|   |     |                            |

## Sanitation and Shock

Sanitizers kill bacteria and other organic waste by breaking them down to non-harmful level which are filtered out. Before you fill your spa, you need to decide which chemical sanitizer you wish to use. Consult your Cal Spas dealer for the right decision with regards to your lifestyle and spa usage.

**We recommend granulated chlorine or bromine as your sanitizer.** Both work well when maintained regularly. DO NOT USE TABLET OR COMPRESSED SANITIZERS. Use of these sanitizers will void your warranty.

**Note: DO NOT USE Trichlor. Trichlor is very acidic and the hot temperature of the spa causes it to dissolve too fast, it will cause damage to your spa and will void your warranty.**

Whichever chemical you decide to use, do not take shortcuts. It will provide you with clean, safe, clear, spa water with a minimum of effort. Spa owners with an ozonator still need to use a chemical sanitizer. Whenever you test chemical levels, your test strip will likely have a test for chlorine or bromine. Make sure your sanitizer falls within the range shown on the next page.

Whenever you test your chemical levels, your test strip will likely have a test for chlorine or bromine. Make sure your sanitizer falls within the range shown on the next page.

*After you choose a sanitizer, you will need to establish a baseline and maintain it regularly.*

Sanitizing your spa with chlorine or bromine is very similar. Each sanitizer has its advantages and disadvantages. Sanitizer helps neutralize bacteria that can cause illness and other organic matter.

**Bromine:** Creates less odor and skin irritation than chlorine, bromine is less likely to do so. Additionally, unlike chlorine when bromine combines with bather waste and other contaminants in the water it remains an effective sanitizer. Bromine is also far less pH dependent than chlorine. Always remember that bromine itself is not a sanitizer, it needs to be activated with a bromine shock chemical in order to be effective, speak with your spa dealer for more information.

**Chlorine:** The most commonly recognized sanitizer is chlorine. However, the effectiveness of chlorine depends heavily on the pH level of the spa water. In order to get the most effective and economical benefit of chlorine, you must maintain a consistent pH level of between 7.2-7.6; a disadvantage of using chlorine is that when chlorine combines with bather waste and other contaminants, not only does it lose its sanitizing ability, it can cause odors and irritate eyes and skin to individuals with sensitive skin or prolonged spa exposure.

| Testing For:   | Ideal Range (ppm) |         |
|----------------|-------------------|---------|
|                | Minimum           | Maximum |
| Chlorine Level | 3.0 - 5.0         |         |
| Bromine Level  | 6.0 - 11.0        |         |

**Note: If you choose to use bromine or chlorine we do not recommend the use of a floater. You have more control over the sanitizer levels by adding sanitizer as needed. Chemical abuse will void your warranty.**

**Starting with fresh water/pre-filtered well water:**

1. Establish a baseline by adding either granulated chlorine or bromine.
  - Use a half ounce of chlorine for every 500 gallons of water
  - Use half an ounce of bromine for every 100 gallons
2. Run the Jets for 10 minutes (Press/toggle the pump 1 button/icon)
3. Test the water, make sure the pH, TA, and CH levels all fall within the ranges shown in the previous pages, make adjustments as needed.
4. After balancing the water, if you are using bromine to sanitize your spa, you must activate your bromine. You will need to shock-oxidize the bromine inside of your spa. Depending on the size of your spa, usually you must add one to two ounces of shock, refer to the instructions inscribed in your chemical of choice.
5. Test the water again, when the water is balanced, your spa is ready to use.

## Shocking the Water

In addition to using a chemical sanitizer, you will periodically need to shock the water. Shocking the water helps remove burned-out chemicals, bacteria, and other organic material from your spa's water and improves your sanitizer's effectiveness.

Do not use chlorinating shock, which can damage the spas jets and pump seals. Only use Oxidizer shock. It can be used with either bromine or chlorine sanitizers.

Add two ounces of oxidizer shock per 500 gallons once a week, after heavy bather loads, or if the water has a strong odor. The spa must be running with all of the jets on high for 30 minutes with the cover open. If necessary repeat the oxidizer shock in 30 minute intervals.

## Filtration & Cleaning

The filter is the part of your spa that removes big and microscopic debris from the water to maximize your spas water clarity. Regular maintenance must be done to maximize the spas filtering performance and heat efficiency.

**It is extremely important that you never run the spa without a filter, there is a possibility that debris may be sucked into the plumbing, damaging the spa pumps and heater.**

## Cleaning the Filter

In addition to spraying the filter down with a hose to remove surface debris, the filter must be deep cleaned every so often to dissolve scale and particles that are trapped within the pleats of the filter. Even if the filter looks clean, scale and other particles hide deep within the filter fibers restricting water flow. If the filter is not properly cleaned this will cause flow issues within the spa heater creating a heater malfunction. We recommend cleaning your filter at least once a month or every two weeks depending on spa usage.

Cleaning the filter

1. Remove the filter by unscrewing the filter counterclockwise from the top of the filter, do not use excessive force when removing or installing the filter.
2. Place the dirty filter into a bucket of water where the filter is completely submerged in water. Add the desired filter cleaner of choice, on average most manufactures recommend 8 ounces of chemical cleaner, verify the amount used on your chemical instructions.

**Note: It is recommended to obtain a spare filter to use in the spa when performing maintenance on the dirty filters. This way you can rotate the filters and extend their lifespan.**

3. Soak the filter for a minimum of 24hrs
4. Spray the filter with a water hose, with careful attention between filter pleats.
5. Reinstall the filter, Do not over-tighten.

|                                     |  |
|-------------------------------------|--|
| <b>Prior to each use</b>            | Test the spa water. Adjust chemical levels as necessary.<br>Shock the water by adding ½ teaspoon of sodium dichlor per 250 gallons or 1 teaspoon of MPS per 250 gallons.   |
| <b>After each use</b>               | Add an ounce of oxidizer after heavy bather loads  |
| <b>Once a week</b>                  | Check the filter well and inside the filter pipe for leaves and foreign matter.<br>Test the spa water. Adjust chemical levels as necessary.<br>Shock the water by adding ½ teaspoon of sodium per 250 gallons or 3 teaspoons of MPS per 250 gallons.<br>If your water source is high in calcium, add stain and scale preventer.                  |
| <b>Every two to four weeks</b>      | Deep clean your spa's filter. How often you clean your filter depends on how much you use your spa. There is no harm in frequently cleaning your filter and will only help your spa's efficiency.  |
| <b>Every two to four months</b>     | Change the spa water. How often you change the water depends on how much you use the spa. When you change the water, you will need to: <ul style="list-style-type: none"> <li>• Clean and polish the acrylic surface</li> <li>• Clean and treat the spa cover and pillows</li> <li>• Deep clean the filter</li> <li>• Refill your spa</li> </ul> |
| <b>Each time you refill the spa</b> | Follow the section "Filling and Powering Up Your Portable Spa"   |

## Generic Names for Chemicals

| Water Chemistry      |  |   |
|----------------------|--|---|
| Common name          | Usual chemical name  | Common brand names  |
| pH Up                | sodium hydroxide   | pH Increaser, pH Up, pH Plus, pH Booster                        |
| pH Down              | sodium bisulfate<br>sodium bicarbonate (baking soda)<br>sodium carbonate   | pH Decreaser, pH Down, pH Minus, pH Subtracter, Dry Acid        |
| Alkalinity increaser | sodium carbonate<br>sodium bicarbonate (baking soda)   | Alkalinity Increaser, Alkaline Up                               |
| Alkalinity decreaser | sodium bisulfate   | Alkalinity Decreaser, Alkaline Down                             |
| Calcium increaser    | calcium chloride   | Calcium Increaser, Calcium Up, Calcium Plus, Hardness Increaser |
| Calcium decreaser    | N/A To decrease calcium hardness, drain several gallons of water from the spa and refill using a mixture of 75% hard water and 25% soft water, or use a stain and scale inhibitor. |   |

**Sanitizers**

| Common name | Usual chemical name | Common brand names   |
|-------------|---------------------|--|
| Chlorine    | sodium dichlor      | Both chlorine and bromine are available under numerous brand names |
| Bromine     | sodium bromide      |  |

**Shock**

| Common name | Usual chemical name | Common brand names           |
|-------------|---------------------|------------------------------|
| MPS         | monopersulphate     | MPS Shock, Oxy-Spa, SeaKlear |
| Dichlor     | sodium dichlor      | Dichlor Shock                |

**Note:** Dichlor (chlorine) is both a sanitizer and a shock. Monopersulphate (MPS), when used as a shock, can be purchased alone as non-chlorinated shock or combined with dichlor, which makes it significantly more effective than MPS alone.

**Other chemical additives**

| Common name               | Usual chemical name   | Common brand names  |
|---------------------------|---|---|
| Stain and scale inhibitor | These are usually proprietary chemical formulations and cannot be purchased as a single generic chemical. | Metal Stain Gone, Scale Inhibitor, Stain and Scale Preventer, Stain and Scale Defense   |
| Foam inhibitor            |   | Foam Gone, Foam Down, Defoamer  |
| Clarifier                 |   | Water Brite, Spa Bright, Water Clarifier, Clear Water, Natural Clarifier, Brite & Clear |

**Do NOT use these in your spa:**

- Sodium hypochlorite (household bleach)
- Trichlor

## Common Water Chemistry Questions

**Question :** Why is the use of a floater not recommended to sanitize my spa water?

**Answer:** We do not recommend the use of a floater for three reasons:

- The floater is unable to control the rate at which the sanitizer is dissolved into the water. When a floater is placed into a spa the sanitizer levels inside the spa can be extremely high. High sanitizer levels over a period of time will cause chemical burns and discolor the spa shell, jets, pillows, and spa cover underside. The use of floaters tends to lead to negligence of spa water sanitizer levels as well. Once the sanitizer is all dispensed and the floater is not checked daily, the low sanitizer level will allow viruses, algae and harmful bacteria like Legionella (Legionnaires disease) and E-Coli to grow.
- Floaters tend to stay in one area of the spa most of the time, causing this area to be exposed to extreme sanitizer levels. Most commonly a floater will become trapped near the filter weir or a seat, causing chemical damage to the section of the spa.
- The floater may allow small chunks or pieces of the concentrated sanitizer to fall out of its housing causing the chunks to settle at the bottom, causing pitting or chemical blisters to the spa shell. For this reason we advise you to use granulated chlorine or bromine as granulated sanitizers are designed for dissolve quickly inside of the spa with your jets activated. Chemical abuse is not covered under the terms of the limited warranty.

**Question :** When I open my spa, I smell chlorine. How to I get rid of the smell?

**Answer:** There are two types of chlorine in your spa. the first is “Free Chlorine” which is chlorine molecules that are available to sanitize your spa. This free chlorine does not have an odor. The second is chloramine, which is a byproduct of chlorine that has already been used/expended to sanitize. Chloromanes generate the strong chlorine smell most spa owners experience. This can be eliminated by shocking your spa water, if you smell chlorine in the water, its time to shock.

**Question:** Why can't I fill my spa with soft water?

**Answer:** Soft water is essentially the same as regular water except in one regard that is important for spa chemistry and that is calcium levels. The calcium inside of the water has been replaced by sodium, which can be corrosive to heaters, pumps, and other plumbing equipment which will become expensive to replace. Calcium is needed for certain chemicals to properly function as well. Only use potable water that has not been treated with a water softener.

**Question:** I am concerned about the amount of chemicals my family is exposed to, do I really need to use as many chemicals in large amounts?

**Answer:** While there should be concern of over exposure to any chemical being unhealthy, spa chemicals when used correctly are designed to be effective and beneficial. In the case of spa water, the chemicals we recommend are important to protect the user from waterborne illness, including skin infections and disease causing pathogens, chemicals also help to prevent corrosion of spa components.

**Question:** Why isn't water chemistry damage (chemical abuse) covered under warranty?

**Answer:** The chemical levels and water quality of the water in the spa are directly under your control. With proper basic care the spa will provide many years of hot water relaxation. If you are unsure about water chemistry, reach out to your spa dealer.

## Do's and Dont's

- Do add chemicals slowly into the front of the filter compartment/weir with jet one operating for at least 10 minutes.
- Do use special care if using baking soda to clean either the interior or exterior plastic surfaces.
- DON'T use swimming pool muriatic acid to lower pH.
- Don't splash pH increaser additives on the siding.
- Don't Use compressed sanitizers, The use of bromine sticks or tablets in floaters may become trapped in a lounge or cooling seat, and in some cases sink to the bottom of the spa. This may cause discoloration or stress on the spa shell.
- Don't use a floater type sanitation system as a low or no maintenance solution to your spa maintenance. Floating dispensers can become trapped in one area and cause an over sanitation (or chemical burn) of the particular area, damaging acrylic, jets, and pillows. If the dispensers setting is too high, the higher concentration can also cause chemical burn damage throughout the spa. This kind of chemical damage can be done by both bromine and chlorine sanitizers.
- Don't use a sanitizer which was not designed for spas.
- Don't use household bleach (liquid sodium hyperchlorite).
- Don't broadcast or sprinkle the chemicals onto the water surface. This method can cause chemically induced blistering on the spa surface (chemical abuse).

## Bather Load

“Bather Load” is the term used to describe the number of people using a spa, combined with the length of usage, and the frequency of usage. All these factors have a great effect on the spa water. The higher the bather load, the more chemicals need to be added and a longer filtration time will be needed.

Recommendations are designed for spas with average bather load (3 to 4 people, 15 minutes of usage, three times a week at 100 degrees). If your bather load exceeds these guidelines, and you experience water quality problems, increase the amount of filtration first, (go to the next higher filtration number) then if water quality is still not adequate, consult the advice of your Cal Spas dealer for additional chemical or system recommendations. Be sure to give them your bather load information.

## Ozonator

The ozone generator releases ozone into the spa water. You will still need to test for chlorine/bromine and occasionally replenish it to return the sanitizer level back to baseline. **For spas without a circulation pump, “Pump 1” will run at low speed and the ozonator will run during filtration.**

The spa’s control system is factory programmed with one filter cycle that will run in the evening, aligning with lower energy rates in that time slot. The time and duration of the filter cycle can be set according to your needs. In addition, a second filter cycle can be enabled. Filtration time may need to be increased with a heavy bather load.

Make sure water diverter valves are turned all the way to the left or right, and never left in the center position during filtration cycles. When the diverter valve is in the center position, there is not enough suction from the pump in order to inject ozone into the spa. The ozonator will generate ozone, but it would not be injected into the water effectively.

## Troubleshooting Water Clarity

| Problem      | Probable Causes  | Possible Solutions   |
|--------------|--|--|
| Cloudy Water | <ul style="list-style-type: none"> <li>• Dirty Filter</li> <li>• Excessive oils/ Organic matter</li> <li>• Improper sanitation</li> <li>• Suspended particles/organic matter</li> <li>• Overused or old water</li> </ul> | <ul style="list-style-type: none"> <li>• Clean filter</li> <li>• Shock spa with sanitizer</li> <li>• Add sanitizer</li> <li>• Adjust pH and/or alkalinity to recommended range</li> <li>• Run jet pump and clean filter</li> <li>• Drain and refill spa</li> </ul> |
| Water Odor   | <ul style="list-style-type: none"> <li>• Excessive organics in water</li> <li>• Improper sanitation</li> <li>• Low pH</li> </ul>   | <ul style="list-style-type: none"> <li>• Shock spa with sanitizer</li> <li>• Add sanitizer</li> <li>• Adjust pH to recommended range</li> </ul>  |
| Musty Odor   | <ul style="list-style-type: none"> <li>• Bacteria or algae growth</li> </ul>   | <ul style="list-style-type: none"> <li>• Shock spa with sanitizer</li> <li>• Adjust pH to recommended range</li> </ul>   |

| Problem                               | Probable Causes  | Possible Solutions  |
|---------------------------------------|--|---|
| Organic Buildup/ Scum Ring Around Spa | <ul style="list-style-type: none"> <li>Buildup of oils and dirt</li> </ul>   | <ul style="list-style-type: none"> <li>Wipe off scum with clean rag - if severe, drain the spa, use a spa surface and tile cleaner to remove the scum and refill the spa</li> </ul>   |
| Algae Growth                          | <ul style="list-style-type: none"> <li>High pH</li> <li>Low sanitizer level</li> </ul>   | <ul style="list-style-type: none"> <li>Shock spa with sanitizer if problem is visible or persistent, drain, clean and refill the spa</li> </ul>   |
| Eye Irritation                        | <ul style="list-style-type: none"> <li>Low pH</li> <li>Low sanitizer level</li> </ul>  | <ul style="list-style-type: none"> <li>Adjust pH</li> <li>Shock spa with sanitizer and maintain sanitizer level</li> </ul>  |
| Skin Irritation/ Rash                 | <ul style="list-style-type: none"> <li>Unsanitary water</li> <li>Free chlorine level above 5ppm</li> </ul>                           | <ul style="list-style-type: none"> <li>Shock spa with sanitizer and maintain sanitizer level</li> <li>Allow free chlorine level to drop below 5 ppm before spa use</li> </ul>   |
| Stains                                | <ul style="list-style-type: none"> <li>Total alkalinity and/or pH is too low</li> <li>High iron or copper in source water</li> </ul> | <ul style="list-style-type: none"> <li>Adjust total alkalinity and/or pH</li> <li>Use a stain and scale inhibitor</li> </ul>  |
| Scale                                 | <ul style="list-style-type: none"> <li>High calcium content in water - total alkalinity and pH too high</li> </ul>                   | <ul style="list-style-type: none"> <li>Adjust total alkalinity and pH - If scale requires removal, drain the spa, scrub off the scale, refill the spa and balance water</li> <li>Use a stain and scale inhibitor</li> </ul> |

## Chemical Abuse

Chemical abuse is defined as negligent/careless use of both recommended spa chemicals, and use of prohibited chemicals. The spa shell is designed to last for many years, but when the shell is exposed to excessive chemicals, or improper chemical application; this can cause reactions on the shell that can cause pitting, cracks, bubbling, and other blemishes on the shell.

Spa jets, pillows, and other components are designed to withstand sanitizer levels within the range mentioned in this manual. Excessive sanitizer use will cause oxidation of the interior of the spas metals and other components, which can cause rust/oxidation of jets, deterioration of spa pillows, speakers and plastics, and damage/oxidation of the spa cover.

Components & materials damaged by chemical abuse are not covered under warranty. Depending on the extent of damage the entire spa warranty can be voided, as stated in the limited warranty.

## Cleaning and Maintenance

### Removing and Re-seating Pillows

You can remove the pillows for cleaning and maintenance quickly and easily. This method works for all pillow types.

Grab the lower edge of the pillow with both hands and firmly pull up, as you do this the pillow inserts will pop out of the holes.

Re-seat the pillows by aligning the pillow inserts with the holes and striking the pillow hard enough for the insert pegs to pop back in place.




**\*\*Note: Images are for illustration purposes only, color and styles are subject to change**

### Jet Removal and Replacement

Jets can be easily removed for cleaning.

Grasp the outer lip/rip of the jet and turn it counter-clockwise until it completely stops, you may feel the jet loosen and pop out a bit, pull the jet outward. The jet will be very snug and may require additional turning force to pop-out. **DO NOT PRY OUT JETS**

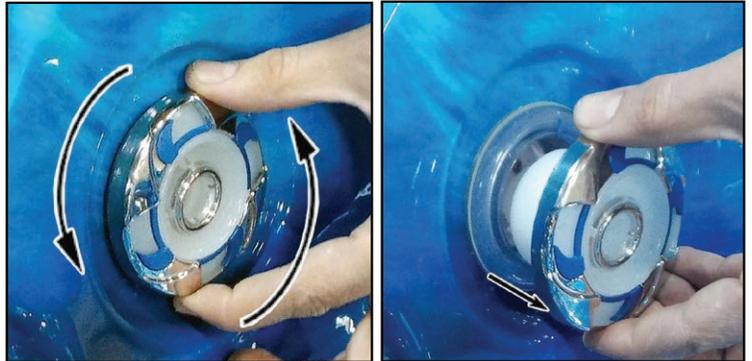

To replace the jet, place it in the fitting and turn clockwise until it click into place and can be rotated freely to open and close water flow again.

**Note: have the jets turned off when removing jet inserts, it will be easier to remove when there is no water flow through it.**

Your dually spa should be drained every two to three months for cleaning and maintenance and re-filled with fresh tap water. Before you begin turn the power off to the spa at the breaker and remove your filters.

### Step 1. Locate Your Drain

Pull the knob out of the cabinet. the Dually spa has two drains, one for each side. The cabinet drain is screwed into the drain pull knob.



#### *For spas with drain inside the spa*

Using a Phillips screwdriver, remove the screws to the access panel and open it. Locate hose ending with the  $\frac{3}{4}$  inch hose-bib fixture as shown below.



### Step 2. Remove the cap

Make sure the valve is in the closed position, then unscrew and remove the cap.



### Step 3. Connect Valve to a Hose

Attach a garden hose to the hose-bib fixture. Place the other end of the garden hose where you would like the water to drain too.

### Step 4. Drain the Spa

Turn the valve on the hose-bib fixture to open the drain. When the spa has drained completely, turn the valve on the hose-bib fixture, remove the hose and replace the cap.

## Winterizing (Cold Climate Draining)

Depending on your region in your country, the temperature could drop below 32F(0°C). If you are one of those regions, we recommend that you always have your spa full of water and running at normal spa temperatures between 80°F - 100°F (26.7°C - 37.8°C). This will help reduce the risk of water freezing in your spa and inside of the spa equipment.

**WARNING: If you find the need to drain your spa, be aware of the potential risk of water freezing in your spas equipment and plumbing, even if the directions below are followed perfectly, there is no guarantee that your spa will not suffer freeze damage. Freeze damage is not covered under warranty.**

- 1 - Open all filter covers.
- 2 - Remove the filter baskets and filters
- 3 - Drain your spa completely.
- 4 - Vacuum water from the spa's main drain fitting with a wet/dry vacuum
- 5 - Open the bleeder valves on the pumps
- 6 - For spas equipped with a UV light, loosen the quarts tube nut to let the water drain from the UV light chamber.
- 7 - Disconnect the unions from both sides of the pump.
- 8 - Blow out any remaining water out of the jets, suctions, filter canister, and equipment area with a wet/dry shop vac.
- 9 - When it has completely finished draining, replace the quarts tube in the UV lamp chamber, and tighten the nut. Close the bleeder valves and re-connect the unions on the pumps.
- 10 - Replace the filter basket and filters.
- 11 - Cover your spa with a good spa cover and an all weather tarp to ensure neither rain nor snow enters the spa.



**Note: Do not use antifreeze to treat your spa, irreversible damage will occur to seals and spa finish, voiding your warranty.**

## Cleaning and Replacing the Filter

Filtration is one of the most important steps you can take to ensure clean, clear water. It is far less expensive to fix water clarity problems by properly filtering your spa than using excessive amounts of chemicals, excessive filtration times, or by water replacement.

## Vacation Care

You can leave your spa unattended for up to two weeks if you follow these general instructions that apply for most spa models. Always refer to the control panel section of this owners manual.

**Note: Always lock your spa cover using the cover locks if you plan to be away from home and the spa is filled with water, these instructions will help maintain your water quality for up to two weeks. Use of the spa during this period of time by guests or family can affect the clarity and conditions of the spa.**

Select a low range temperature of 80F (27C)

*Note: Economy mode within the ink.336 controller may be used to maintain water temp for an extended absence (pg25)*

1. Use a test strip, Adjust pH, AK, and CH if necessary.
2. Shock the spa water with your selected sanitizer (Add either bromine or chlorine)
3. Lock the spa cover to the cover locks.
4. When you return, test the water again and adjust pH and shock the water again.

If you will not be using your spa for longer than 14 days and the spa is not able to be maintained, we recommend following the cold climate procedure to prevent algae growth, bacteria, and spa damage.

The spa cover can be considered one of the most important parts of your spa. The spa cover helps retain the heat inside of your spa in all different types of weather. The cover works as a lid on a thermos, when the spa is not in use the cover helps lower the amount of time the spas heater has to run for. Using the cover will help lower your operating cost of your spa when the spa is not in use.

**Note: The cover is constructed of rigid foam and metal, but it is not meant to support weight for your safety, do not sit, stand, or lie on the cover, nor should you place objects on top of the spa cover**

- Covered spas will protect your spas finish from the suns ultraviolet rays.
- You are required to use the spa cover to maintain warranty coverage.
- Covering your spa prevents children or pets from drowning in your spa.

**Step 1** Place cover on spa. Make sure it is correctly positioned, with the skirt of the cover wrapping over your spa shell. This helps prevent blistering and cracking from sun exposure.



**Step 2** Position the tie-down hardware (attached to the straps of your cover) on the side of the spa so they are easily reached by the cover tie-down straps.



**Step 3** With the straps pulled tight (but not overly tight), lightly pre-drill the location for screw placement. Gently drill 3 holes - one for each screw slot in the lock.

Note: Use a low torque drill, or use the lowest setting on your drill, do not drill in the screw all the way as the corners are designed with an air pocket inside to retain heat inside of your spa. Too much force may deform the shape of the corner and would not look as appealing.



**Step 4**

Use a screwdriver to finish screwing in the three screws, repeat this process for the remaining 3 corners.



**Step 5**

Keep the cover fastened down at all times when not in use, locking hardware may be locked with a key (provided in the packaging of the spa cover)



**Step 6**

The provided key will allow you to lock down your spa cover. We recommend locking your spa cover when the spa is not in use. Store your key somewhere safe, away from children.



**WARNING**  
**AVOID**  
**DROWNING**  
**RISK**

**FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN INJURY OR DROWNING  
NON-SECURED OR IMPROPERLY SECURED COVERS ARE A HAZARD.  
REMOVE COVER COMPLETELY BEFORE ENTRY OF BATHERS.  
ENTRAPMENT POSSIBLE.  
KEEP COVER ON SPA AND LOCKED WHEN NOT IN USE**

### Spa Cover and Pillows

Due to constant punishment your spa cover and pillows receive, you should protect them by applying a vinyl and leather cleaner as part of your monthly maintenance plan. Use a product that is specifically designed to protect spa covers and pillows from chemical and ultraviolet light damage without leaving an oily residue behind that is normally associated with common automotive vinyl protectants.

**Warning DO NOT use automotive vinyl protectants on spa covers or pillows. These products are generally oil-based and will cause severe water clarity issues that are difficult to correct.**

### Spa Shell

Each time you drain the spa, before you refill it you should clean your spa shell with an all purpose cleaner and apply a coat of surface protectant. Use a mild detergent, non-abrasive cleaner specifically formulated to clean the spa without damaging acrylic finish.


Use a non-oil based surface protectant that is specifically formulated to protect the spa's finish from the chemicals and minerals associated with normal spa use.

## Using the Freedom Sound System

The Freedom Sound System entertainment option contains a Bluetooth-enabled speaker system that is available for certain Cal Spa models. Any Bluetooth-enabled device can be used to play audio through your spa. Before you can use the sound system you need to pair the Bluetooth module to your device. The antenna is located within the spa cabinet. The speaker system takes a direct input from your device, Bass and treble can be adjusted within your device/app settings. Follow the Pairing procedure, the example shown below is from an iPhone device. Your device may appear differently.

1. Select Bluetooth from your device's options list ensure that Bluetooth is turned on.
2. Select "Aquatic AV" from the list of available devices to pair.
3. Your iPhone may ask for a code to pair with the speakers, the code is 0000 (Android devices-no code needed)
4. Allow your device to pair with the spas Bluetooth module.
5. When the devices have been connected, the device Aquatic AV will be highlighted.

**Note: All sounds from your device will be played through the sound system, including system sounds and telephone notifications.**

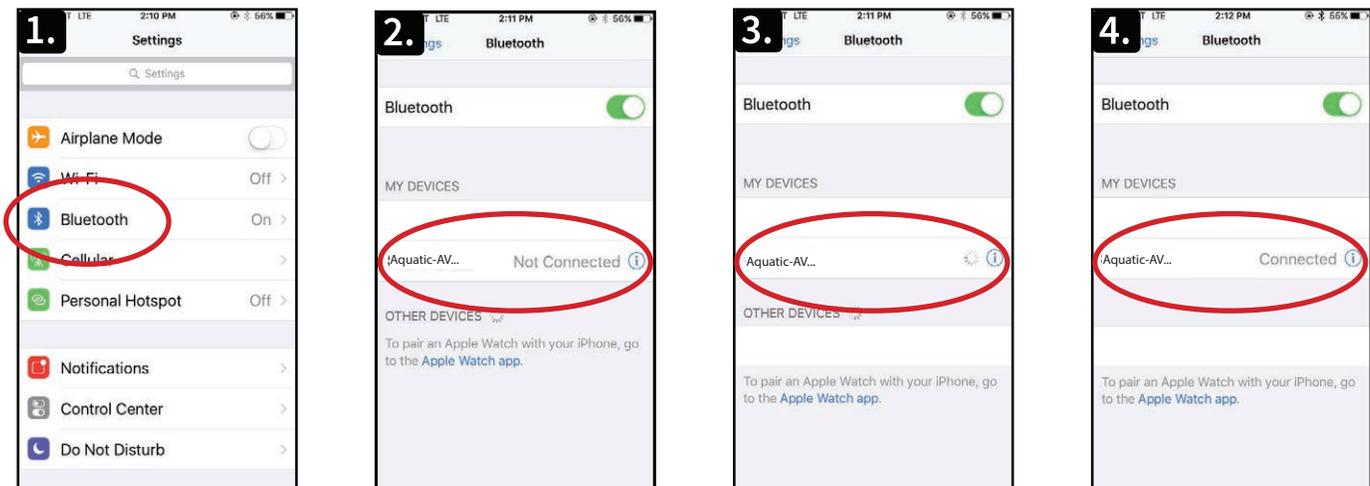

## Basic Troubleshooting

The troubleshooting guidance provided here is intended to cover the most common problems a spa owner may encounter. For more in-depth troubleshooting, go to [www.calspas.com/troubleshooting](http://www.calspas.com/troubleshooting).

| Symptom   | Possible Solutions  |
|---|---|
| <b>Problems starting up</b>                         |   |
| Pump won't prime                                    | See priming instructions  |
| Breaker keeps shutting off                          | Reset the GFCI breaker. If this continues, contact your dealer or a qualified spa technician.   |
| <b>Power and system problems</b>                    |   |
| System won't start up or breaker keeps shutting off | Power may be shut off. Turn on GFCI circuit breaker. If this continues, contact your dealer or a qualified spa technician.  |
| Control panel doesn't respond                       | Turn on or reset the GFCI circuit breaker. If this does not solve the problem, contact your dealer or a qualified spa technician.<br><br>If you hear the pump running but the control panel doesn't respond, contact your dealer  |
| Spa does not turn off                               | Spa may be trying to heat up. Check if spa is in Ready or Rest mode<br><br>In cold climates, if spa is not equipped with full foam or any kind of insulation, it will try to maintain the set temperature. Set the spa to low temperature range and set the temperature to 80°F.<br><br>Spa may be in filter cycle. If it is, this is normal and no adjustment is necessary.  |
| Message on the control panel                        | There may be a problem. See Diagnostic Messages   |
| <b>Heat problems</b>                                |   |
| Spa water does not get hot                          | Spa may be in low temperature range. Set the spa to high temperature range.<br><br>The filter may be dirty or may need to be replaced. Clean or replace the filter.<br><br>The water level may be too low. Fill the spa with water level at 4 to 6 inches from the top.<br><br>The temperature is not turned up high enough. Raise temperature on topside control.<br><br>Cover the spa. The cover will keep heat in the spa and help keep heat from escaping. Make sure cover is on at all times when spa is not in use.<br><br>The heater element may be old, deteriorated, coated with scale, or defective. Contact your dealer for more assistance.<br><br>The gate valves may be partially or completely closed. NEVER OPERATE YOUR SPA WITH THE GATE VALVES CLOSED! |

| Symptom   | Possible Solutions   |
|---|--|
| Spa overheats - temperature greater than 110°F / 43°C | <p>Overheating can occur during summer months and may not necessarily indicate a malfunction. When it occurs, a message code may also appear on the control panel.</p> <p>Temperature may be set too high. Turn the set temperature down to a lower temperature.</p> <p>Filtration time may be too long. Turn the filtration cycles down during the warm months.</p> <p>The spa may not be properly ventilated. Make sure the front of the spa is not blocked to allow air flow.</p> <p>High speed pumps may have been running too long. Limit pump running time to no more than 15 to 30 minutes.</p> |

**Water pressure problems**

|   |   |
|---|---|
| Low water pressure                                | <p>Jet valves may be partially or fully closed. Open the jet valves.</p> <p>Filter cartridge may be dirty. Clean or replace the filter.</p> <p>Pump may have airlock. Remove airlock by priming spa</p> <p>The suction fittings may be blocked. Remove any debris that may be blocking them.</p> <p>The filter skimmer may be blocked. Remove the blockage.</p> <p>Gate valves may be closed. Open gate valves. Note: Never operate your spa with the gate valves closed!</p> <p>Spa may be running in filtration mode. Press JETS or JETS 1 button to turn on high speed pump.</p> |
| No water pressure (no water stream from any jets) | <p>Power may be switched off. Turn the power back on.</p> <p>The pump may be defective. After you have tried all other troubleshooting, contact your dealer for assistance.</p>   |
| Jets surge on and off                             | Water level may be too low. Add water to normal level.  |

**Pump problems**

|  |   |
|--|---|
| Pump runs constantly – will not shut off | There may be a problem with circuit board. Contact your dealer.   |
| Noisy pump                               | <p>The water level may be too low. Fill the spa with water level at 4 to 6 inches from the top.</p> <p>Filter cartridge may be dirty. Clean or replace the filter.</p> <p>Pump may have airlock. Remove airlock by priming spa</p> <p>The suction fittings may be blocked. Remove any debris that may be blocking the suction fittings.</p> <p>Gate valves may be closed. Open gate valves. Note: Never operate your spa with the gate valves closed!</p> <p>Air may be leaking into the suction line. Contact your dealer for assistance.</p> <p>Debris may be inside the pump. Contact your dealer for assistance.</p> <p>Noise may be a sign of damage. Contact your dealer for service.</p> |

| Symptom                                | Possible Solutions   |
|--|--|
| Pump turns off during operation        | Automatic timer may have completed its cycle. Press JETS or JETS 1 button to start the cycle again.<br>Pump may have overheated due to the vents on the equipment door being blocked. Make sure the front of the spa is not blocked to allow air flow.<br>The pump motor may be defective. Contact your dealer for assistance. |
| Pump has a burning smell while running | A burning smell may be a sign of damage. Contact your dealer for service.  |
| Pump does not run                      | Pump may have over heated. Let it cool for an hour and try operating the spa for a shorter time.<br>Power to the spa may be shut off. Turn on or reset the GFCI circuit breaker. If this does not solve the problem, contact your dealer or a qualified spa technician.  |

## “Thermal Creep”

Cal Spas are designed with energy-efficient components and systems that are meant to sustain heat generated by the equipment, which is then cycled back into the spa water. In hot weather or in situations where the spa is set to extended run times, Thermal Creep may occur. Thermal Creep is a condition where the measured water temperature can be higher than the set temperature. To manage Thermal Creep you may:

**Vent your cover.** This means placing a folded cloth about  $\frac{3}{4}$ " (2cm) thick under all four corners of the cover before you lock the cover down.

**Open your cover.** Opening the cover at night will also quickly cool the water down if desired.

**Open all air controls.** Set your filtration cycles to run during the cooler times of the day or night.

**Reduce the length of your filter cycles.**

**Visit your local dealer for additional guidance.**

Since Thermal Creep only occurs in well-insulated hot tubs, it is not indicative of something that is wrong with your spa or its equipment.

# "in.touch" Wifi Transmitter Set Up



Congratulations for purchasing the optional on Wifi control system. This control system will allow you to observe the spa and control it's features such as temperature, filter cycles, energy saving modes and much more when you are away from home, out of state, or even out of the country.

Please Install the "Smart Spa Control" app developed by Gecko from the app store or the google play store.




Apple App Store




Google Play Store

## Installing the Home Transmitter:

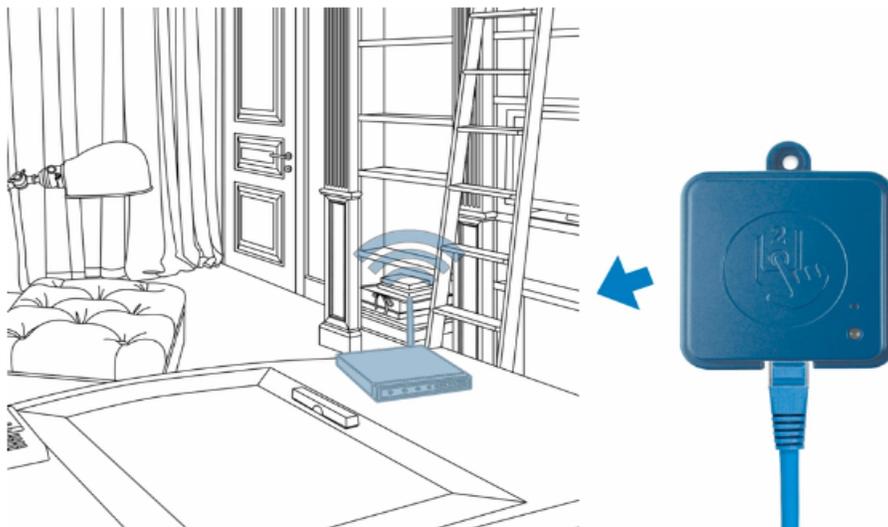

**The home transmitter is provided with an ethernet cable and a power supply.**

The in.touch home transmitter unit must be installed inside the house, connected to a router and powered by the provided wall transformer. A longer ethernet cable may be used to bring the home transmitter closer to the spa.

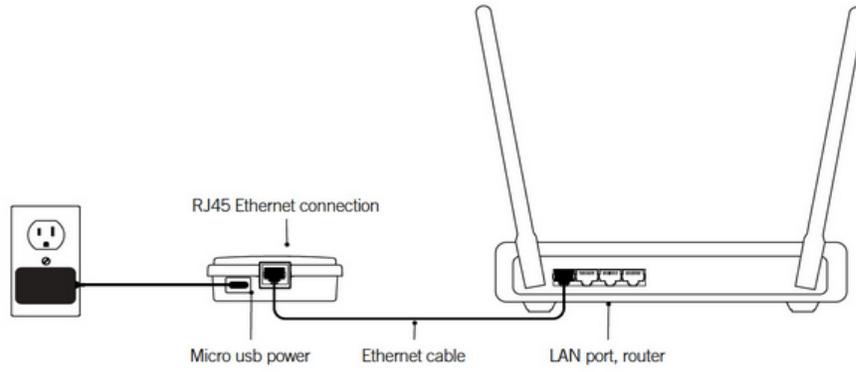

Simply connect the ethernet cable into the RJ45 port of the in.touch 2 home transmitter and in one of the available LAN ports on your router. To power up the home transmitter, plug the provided wall outlet charger to a 120V (North American model) or 220V (European model) household supply and connect the USB cable to the wall outlet and the home transmitter.

**After the home transmitter is connected; connect the internal spa transmitter:**




The Wifi module is installed when manufacturing of your spa if the add on was requested.

Contact your dealer to confirm if your spa is equipped with a Wifi module.

**If you purchased a spa with in.touch as a standard feature or as an option, note that the spa transmitter will be pre-installed.**


To ensure proper signal transmission, it may be necessary to change the position of the transmitter once the spa is installed in the yard. The transmitter should be located on the side of the spa facing the house.

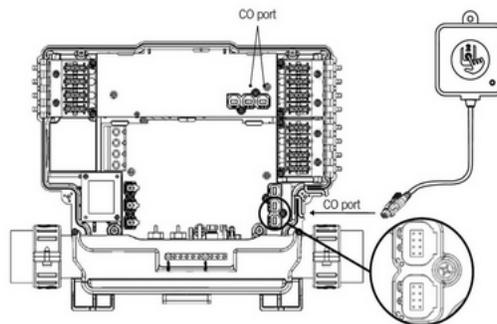

The in.touch spa transmitter must be installed under the spa skirt, at least 12" (30 cm) away from any metal component or structure, as close as possible to the house to optimize the signal strength.

Simply connect the spa transmitter into an available CO port of the spa control system

# "in.touch" Quick Start App Guide

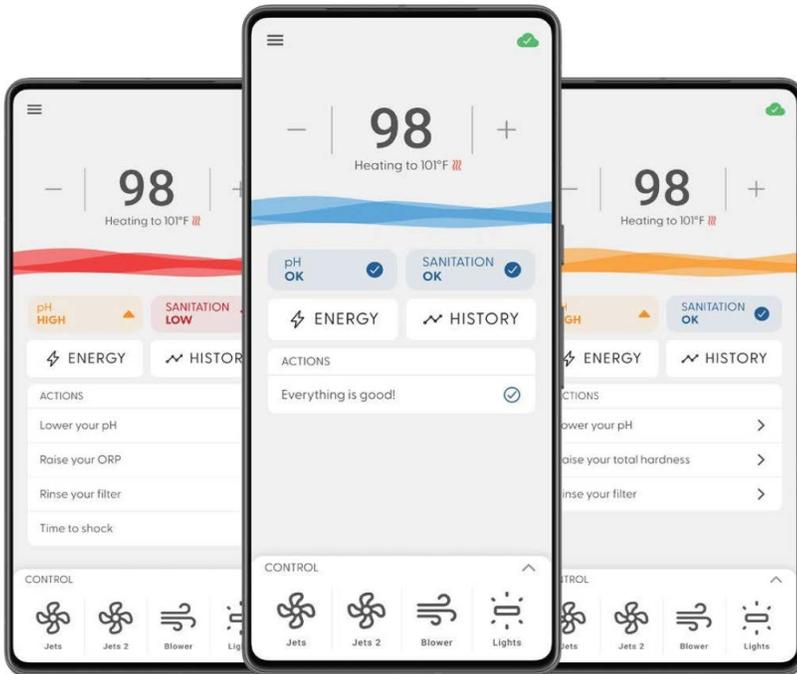

The Gecko "Smart Spa Control" app is an effective tool to monitor, adjust, or activate your spa. Once the two wifi modules have been connected, approach the spa and open the app.

**Ensure that both your devices wifi detection and Bluetooth signal are on, and that your current device is charged to at least 50% before starting the pairing process.**




Apple App Store



Google Play Store

Both Transmitters for your spa are paired from factory, providing electrical power and stable Internet connection are necessary for both in.touch wifi modules to communicate. A technician may need to adjust or reposition the spas wifi module to face towards the home transmitter.

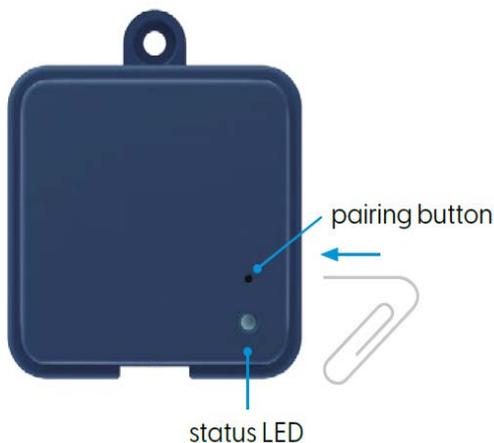

If connection issues persist, un-pairing and pairing the home transmitter may be necessary. Using a paperclip you may insert the end of the clip into the pairing button. The status LED should begin flashing yellow in a rapid pattern to show it is now in pairing mode. It will remain like this until the home module is paired or if the power is cut off to the home module.


Once the home module is flashing yellow, proceed to the spa and turn the power to the spa off at the breaker. Keep the spa turned off for at least 5-10 seconds, then turn the spa power back on. The modules will begin searching for each other and a pair once again.

If issues persist, contact your spa dealer to schedule a service technician, in order to determine the issue or to process a warranty claim.

# "in.touch" Quick Start App Guide




Download the "Gecko Smart spa control" app from the App Store or the Google Play store to proceed with wifi control set up.

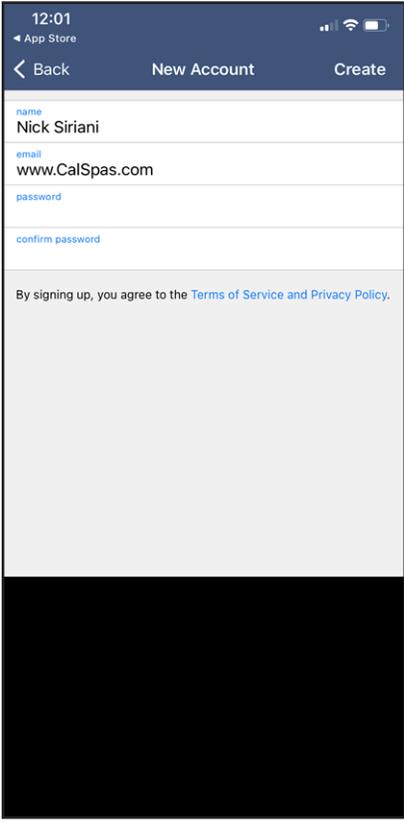

Once the app is downloaded, select "Create an Account" and fill in the requested information to create your account.

**Ensure that your Home Wifi module is powered on and connected**

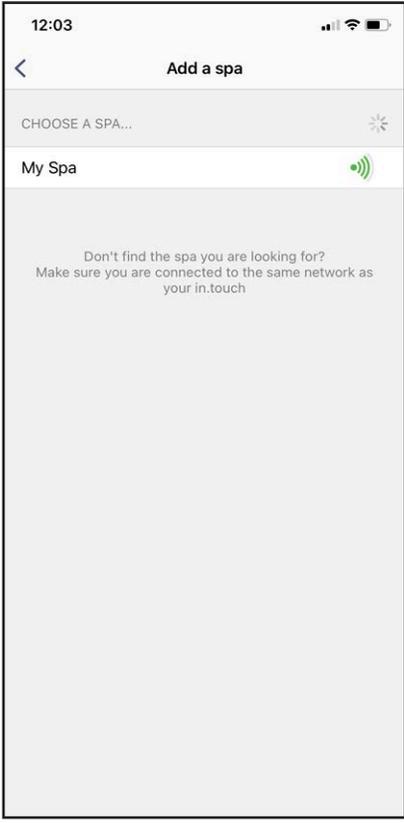

Once the account is confirmed via email, return to the app and the app will begin to search for new spa devices, the spa wifi module will appear.

Select the spa module, the module is now paired.

Congratulations, your in.touch Wifi controller is now paired and ready to use. This app can be used when you are not near your spa to monitor and control the spas activities.








The fastest tool to find replacement parts and accessories


Buying replacement filters, parts, or accessories is part of spa ownership, but finding commonly replaced or ordered parts for your spa model is made easy, and just a few clicks away. Using your spa serial number, you may look up and find your exact spa model and find these components.

Website: WWW.QUICKSPAPARTS.COM


\*\*Note: Images in this guide are for example purposes, no deals or offers shown in these images are accurate. Always check our website for promotions or exclusive offers/discounts

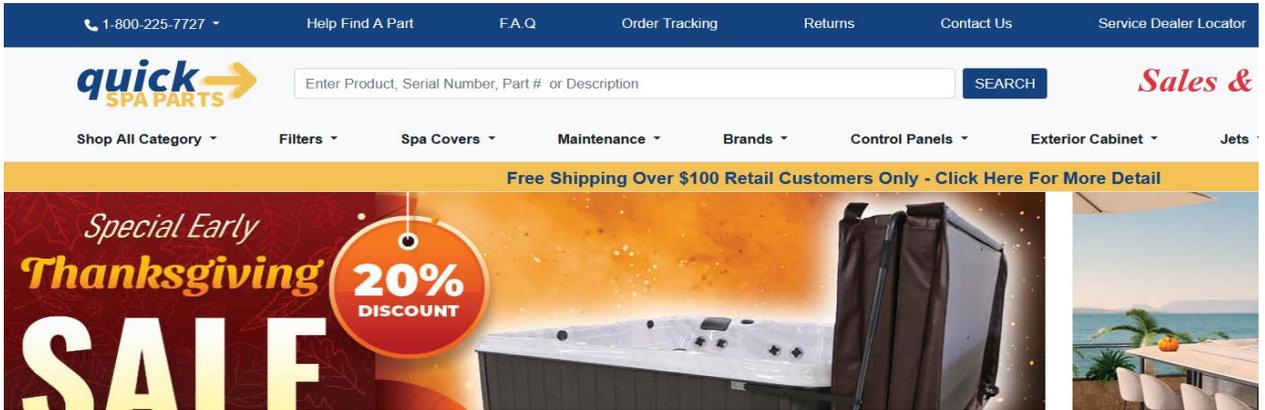

Quickspaparts is our factory parts website, where you can get multiple components for your spa, including common universal components. We intend for our spas to last you for many years to come, therefore we want to ensure the process of ordering common parts, is as easy as it can get.

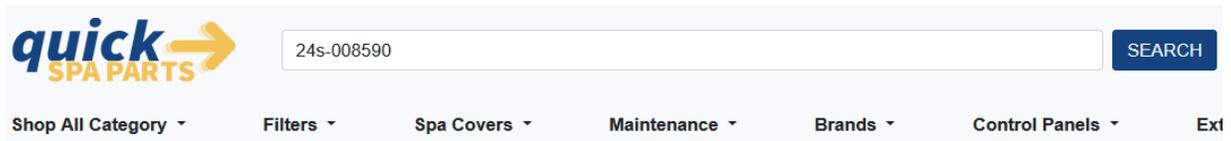

Using your spas serial number (located in the front cabinet, on the bottom right), type this serial number in the quick spa parts search bar to find general components for your spa.

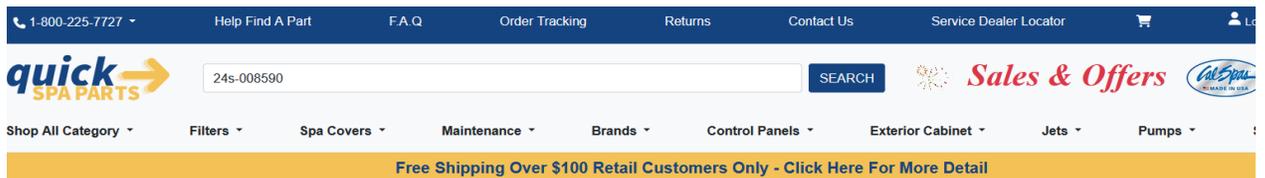

Search Results for Serial Number 24S-008590



- |   |   |                                      |   |  |
|---|---|--------------------------------------|---|--|
| <b>Model# L-S24-EC867L-24</b><br><b>Serial# 24S-008590</b><br>2024 EC-867L-24 67 JETS,<br>LOUNGER, ESCAPE<br>SPAS | <input type="checkbox"/> Accessories (1)    | <input type="checkbox"/> Cabinet (5) | <input type="checkbox"/> Circuit Boards (1) | <input type="checkbox"/> Control Boxes (1) |
|   | <input type="checkbox"/> Control Panels (2) | <input type="checkbox"/> Covers (1)  | <input type="checkbox"/> Electrical (0)     | <input type="checkbox"/> Entertainment (2) |
|   | <input type="checkbox"/> Filter Parts (3)   | <input type="checkbox"/> Filters (0) | <input type="checkbox"/> Heaters (1)        | <input type="checkbox"/> Jets (17)         |
|   | <input type="checkbox"/> Lights (7)         | <input type="checkbox"/> Parts (1)   | <input type="checkbox"/> Pillows (1)        | <input type="checkbox"/> Plumbing (43)     |
|   | <input type="checkbox"/> Pumps (3)          |                                      |   |  |
|   |   |                                      |   |  |

Using your serial number will bring up common components that most spa owners would search for when replacing components. Not all components will appear in the search results, if that is the case reach out to your spa dealer for ordering certain components.

Note: If you dealer is no longer in service, or you have inherited or purchased a used spa. You can contact us directly at customerservice@calspas.com with your spa serial number and an image of the needed component.

|   |  |
|---|--|
| <p><b>2" Cluster Storm Directional Velocity</b></p> <p>PLUCS2441009S-CDCL</p>       |    |
| <p><b>3" Mini storm Directional Velocity</b></p> <p>PLUCS2442009SS-CDCL</p>         |    |
| <p><b>3" Mini Storm Massage Directional Velocity</b></p> <p>PLUCS2442059S-CDCL</p>  |    |
| <p><b>4" Poly Storm Directional Velocity</b></p> <p>PLUCS2443009SS-CDCL</p>         |    |
| <p><b>4" Poly Storm Roto Velocity</b></p> <p>PLUCS2443039SSCDHL</p>                 |   |
| <p><b>5" Power Storm Tri-Directional Velocity</b></p> <p>PLUCS24444019S-CDCL</p>    |  |
| <p><b>5" Adjustable Whirlpool Velocity With Valve</b></p> <p>PLUCS2394009S-CDCL</p> |  |
| <p><b>Velocity 2" Water Diverter Kit</b></p> <p>KIT-D2V-VEL-LGRAY</p>               |  |
| <p><b>Velocity Air Control</b></p> <p>PLUCS6603209-CDHL</p>                         |  |

|  |  |
|--|--|
| <p><b>50 SQ FT Ultra Filter</b><br/>FIL50-5D13H15FCT-3</p>                 |    |
| <p><b>Main Suction Fitting</b><br/>PLU21400203</p>                         |    |
| <p><b>2" Cluster Storm Twin Velocity</b><br/>PLUCS2441029S-CDCL</p>        |    |
| <p><b>3" Mini Storm Twister Velocity</b><br/>PLUCS2442009SS-CDCL</p>       |    |
| <p><b>5" Power Storm Directional Velocity</b><br/>PLUCS2441009SS-CDCL</p>  |   |
| <p><b>5" Power Storm Multi Massage Velocity</b><br/>PLUCS2444059S-CDCL</p> |  |
| <p><b>5" Power Storm Twister Velocity</b><br/>PLUCS2444049S-CDCL</p>       |  |
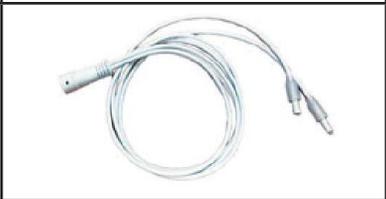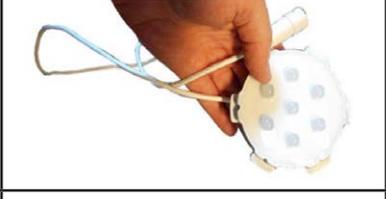
|   |  |
|---|--|
| <p><b>ALX WATERFALL CASCADE SUB ASSEMBLY (Rectangle) Off White</b></p> <p>PLU21800835</p> |  A close-up photograph of a white rectangular sub-assembly installed in a spa. It features a blue LED light strip at the top, and water is cascading down from the bottom. |
| <p><b>1 LED Light String</b></p> <p>LIT16100330</p>                                       |  A coiled white LED light string with a single connector at one end.   |
| <p><b>2 LED Light String</b></p> <p>LIT16100331</p>                                       |  A coiled white LED light string with two connectors at one end.   |
| <p><b>4 LED Light String</b></p> <p>LIT16100332</p>                                       |  A coiled white LED light string with four connectors at one end.  |
| <p><b>1 to 3 LED extension cord</b></p> <p>LIT16100335</p>                                |  A bundle of white extension cords with one multi-pin connector on one end and three two-pin connectors on the other.   |
| <p><b>1 to 1 LED Extension cord</b></p> <p>LIT16100338</p>                                |  A white extension cord with one multi-pin connector on one end and one two-pin connector on the other.  |
| <p><b>Interior Light without Logic</b></p> <p>LIT16100337</p>                             |  A hand holding a circular white light fixture with a yellow cord and a white base.  |
| <p><b>Main Light Housing, LED lens</b></p> <p>LIT630-7048</p>                             |  |
| <p><b>Spa Cover Locks and Keys</b></p> <p>ACC01800026, ACC01800020</p>                    |  Four black spa cover locks and two keys arranged in a 2x2 grid.   |



## Covers

All spa covers are designed with a tapered height, angling downward from the center to the sides to drive off rain and prevent water from pooling. The covers listed below are filled with either 1 lb., 15. lbs., or 2.0 lbs. foam.

**Basic**

4" - 2.5"  
1.5 lbs. foam



**Deluxe**

5" - 3"  
2.0 lbs. foam



|  | Taper Dark Brown Basic | Taper Black Basic | Taper Gray Basic | Taper Dark Brown Standard | Taper Black Standard | Taper Gray Standard |
|--|------------------------|-------------------|------------------|---------------------------|----------------------|---------------------|
| <b>64" x 84"</b><br>Fits spa model: PPZ-537L | COV6484BDB-3           | COV6484BBK-3      | COV6484BG-3      | COV6484SDB-3              | COV6484SBK-3         | COV6484SG-3         |

|                                | Black Deluxe | Taper Black Deluxe         | Taper Dark Brown Deluxe    | Taper Gray Deluxe         |
|--------------------------------|--------------|----------------------------|----------------------------|---------------------------|
| <b>84" x 84" (7 foot spas)</b> | N/A          | COV8484SBK-3<br>(Standard) | COV8484SDB-3<br>(Standard) | COV8484SG-3<br>(Standard) |

### Additional Parts

**Primary Suction Fitting**  
Part#: PLU644-5419-HLGV

**50 Sq Ft Filter Housing Grey**  
Part#: FIL517-4909LC-HLG





## LIMITED WARRANTY

This Limited Warranty is extended to the original purchaser of the spa produced by Lloyd's Material Supply company, Inc. Which Manufactures the Cal Spas brand portable spa manufactured after January 1st, 2026 and installed for residential use in the United States of America and Canada. This Warranty begins on the date of delivery of the spa, but in no event later than one year from the date of manufacture.

### Dual Zone Chill

|                                 |  |                 |
|---------------------------------|--|-----------------|
| <b>Structural</b>               | Warrantied against spa shell collapse, leaks caused by the shell, or dangers of structural integrity due to defects in the spa shell.                                  | <b>10 Years</b> |
| <b>Shell Surface</b>            | Warrantied against spontaneous blistering, cracking, or delaminating of the interior spa shell.  | <b>7 Years</b>  |
| <b>Equipment &amp; Controls</b> | Electrical Equipment- limited to spa pumps, standard heater, and control system/panels, are warrantied against malfunction due to defects in workmanship or materials. | <b>5 Years</b>  |
| <b>Plumbing</b>                 | Warrantied against leaks/cracks due to defects in workmanship or materials   | <b>5 Years</b>  |
| <b>Spa Cabinet</b>              | Warrantied against defects in workmanship or materials. Normal wear and weathering of the finish will occur naturally over time and are not defects.                   | <b>5 Years</b>  |
| <b>Sanitation</b>               | Salt cells & bromine generators are warrantied against defects in workmanship or materials, this includes sanitation control panels & electrical.                      | <b>1 Year</b>   |
| <b>Ozone/UV</b>                 | Ozone Generators and UV treatment systems are warrantied against defects in workmanship and materials. (Excluding UV bulbs older than one year)                        | <b>2 Years</b>  |
| <b>LED Lighting</b>             | LED lights are warrantied against malfunction due to defects in workmanship and materials  | <b>2 Years</b>  |
| <b>Sound System</b>             | The Freedom Sound System is warrantied against malfunction due to defects in workmanship and materials. This does not cover normal wear and tear.                      | <b>1 Year</b>   |
| <b>Spa Cover</b>                | The spa cover is warrantied against malfunction due to defects in workmanship and materials. This does not cover normal wear and tear.                                 | <b>3 Years</b>  |

### Warranty for Other Components

The fuses, headrests, cal grip, labels, and filters are warrantied to be free of defects in workmanship and material at the time of delivery. All other factory-installed components not mentioned specifically, including, but not limited to the wood frame, jets, diverter valves, filter lids, and other mechanical components, are warrantied against malfunction due to defects in workmanship and material for two years from the original date of delivery. This warranty is void if the spa has endured neglect, chemical abuse, or use of unapproved chemicals or components.

**Structural**

This limited warranty covers defects within the spas fiberglass structural shell. This includes sudden spa shell collapse, leaking through the shell, and separation between the spa shell and spa acrylic, caused by faulty bonding. This does not include separation due to micro-abrasions, pin holes in the shell, or warping/bubbling due to sun exposure. This limited warranty does not apply when abuse of the spa shell is evident. This includes but is not limited too, heavy impact craters, fractures on the spa surface due to poor spa care, sun exposure, or reckless use of the spa, and chemical abuse of the spa. This warranty does not cover damage caused by unlevelled ground. Spas must rest on level ground, ideally on a cement slab of 3-6" of thickness depending on the spa weight. Spas that are not placed on a leveled foundation are prone to cracks, delamination, and compromised structural rigidity of the spa. It is the responsibility of the spa owner to ensure that the spas foundation is leveled and inspected before placing the spa.

**Shell Surface**

This limited warranty covers defects on the spas acrylic surface due to workmanship or materials. This covers wrinkles on the acrylic, blistering, peeling, delamination, or spontaneous cracking. This warranty does not cover shell damage caused by chemical abuse, improper water chemistry, excessive sun exposure, micro-abrasions, or damage caused by impacts or sharp objects. This warranty does not cover discoloration, or deterioration of the spa shell when exposed to improper chemistry levels, hard water, soft water, or chemical abuse.

**Equipment and Controls**

This limited warranty covers malfunction of factory installed spa control systems, spa control panels, spa heater, and spa pumps due to defects in workmanship or materials. This covers sudden control box failure, malfunction of control panels or control boxes, malfunctioning heaters, and malfunctioning spa pumps. This warranty coverage is void if the electrical installation of the spa does not follow the outlined diagrams and specifications, mentioned in this manual. Failure to properly follow the specified GFCI requirements, wire type, wire thickness, compliance with NEC guidelines and local codes will void your warranty. This warranty does not cover acts of god or nature that can damage spa equipment, such examples are flooding, lighting strikes, wildfires, or other scenarios out of the control of the manufacturer.

**Plumbing**

This limited warranty covers leaking of water through plumbing joints, tees, hoses, water features, and jet body grommets due to defects in workmanship and materials. This warranty does not cover damage caused by chemical abuse, improper water chemistry, or use of unapproved chemicals/sanitizers. This warranty does not cover freeze damage caused by frozen water expanding within the plumbing of the spa. The winterization procedure within this manual does not guarantee freeze damage prevention. The best method to ensure the spa does not encounter frozen water within the plumbing is to have the spa operating during the colder months of the year. This warranty does not cover freeze damage or damage to the plumbing due to acts of god and/or nature including but not limited too snowstorms, blizzards, power outages, etc. This warranty does not cover oxidation or warping of jets due to chemical abuse or exposing an empty spa to the elements with no secured cover.

**Spa Cabinet**

This limited warranty covers defects in workmanship and materials of spa cabinet panels. This warranty applies for warping of spa panels, cracking of corners and panels without clear impact markers, and buckling of spa panels. This warranty does not cover natural wear and tear, which occurs with plastics exposed to the sun. This warranty does not cover panel damage from excessive heat sources, calcium/water-spot build up from sprinklers or irrigation systems, or impact damage. Each claim for spa cabinets are evaluated on a case by case basis, it is the responsibility of the spa owner to acknowledge environmental factors, that can affect the maintenance of the spas cabinet panels. Using plastic spa protectants can prolong the life of your spa panels is highly recommended in high UV index climates. Deterioration/fading of color, natural wear and tear of plastic materials is expected over time, and is not considered a defect in materials. This coverage does not extend nor cover acts of god or nature that can damage spa panels, such examples are flooding, high winds, wildfires, tornadoes or other scenarios out of the control of the manufacturer

### Sanitation

This limited warranty covers malfunctions of factory installed Salt Systems and Bromine generators, which are warranted against malfunction due to defects in workmanship or materials. This includes the salt cell, sanitizer control panels, bromine generator, and power supplies for Cal Salt systems. This warranty does not cover negligent operation of sanitizer systems, chemical abuse, damage caused by improper water chemistry, or disregard of specified data points for safe operation; including but not limited to, incorrect ppm levels of salts, excess operating hours of the Cal Salt cell, or improper maintenance of sanitation components. The spa filter is not a part of this warranty, and is considered a disposable item subject to regular wear and tear.

### Ozone/UV Systems

This limited warranty covers malfunctions of factory installed Ozone and/or UV water treatment systems. This includes leaks through welded components, water back-flow into the ozone generator, and short circuited Ozone or UV systems. This warranty does not cover UV bulbs that are older than 10 months, the UV light must be replaced every 10-12 months as this is normal wear and tear of component. This warranty is voided if alterations/modifications of these systems are evident, or if the spa electrical connections were not installed in accordance to defined specifications within this manual, evidence of chemical abuse, and acts of god and/or nature.

### Sound System

This limited warranty covers malfunctions of factory installed sound system components. This includes the subwoofer/amplifier, speakers, speaker grills, power supply, or Bluetooth antenna. Natural wear and tear of speaker cones is not covered by this warranty, nor are deterioration of speakers exposed to chemical abuse.

### Spa Cover

The spa cover is warranted against defects of materials and workmanship for the defined period mentioned in this warranty. Exposure to UV rays on untreated or poorly maintained spa covers are not covered by this warranty. It is the responsibility of the spa owner to use spa UV plastic protectants on their spa covers, especially in high UV index climates. Exposure to UV light without proper treatment leads to problems such as cracking/peeling of vinyl covers, and sudden fading of color. This warranty does not warrant against damage caused by chemical abuse, nor yellowing or oxidation of the spa cover when exposed to excess sanitizer. If a defect is found within the first 90 days of ownership, your Cal Spas dealer and Cal Spas can directly assist the spa owner filing a claim and replacing the spa cover if deemed necessary. Spa owners with spa covers past the 90 day period that are discovered to have a defect, can contact your Cal Spa dealer to begin the process of filing a claim. When filing a claim of a spa cover than is older than 90 days, this warranty will cover the material cost of issuing a new vinyl sleeve for the cover, and/or replacement foam for your cover. Shipping/freight costs are not covered in this warranty, and are the sole responsibility of the spa owner. Images of the cover from all sides including the top and underside are necessary to file a claim.

### Genuine Cal Spas Parts & Accessories

This Limited Warranty is void if Lloyd's Material Supply Company, Inc., Manufacturer of the Cal Spas brand or its designated representative determines that the spa has been subjected to damage or failure due to installation of aftermarket parts that are not genuine Cal Spas branded parts and accessories. This disclaimer includes, but is not limited to filters, UV bulbs, ozone systems, salt systems, replacement parts and other accessories. Genuine Cal Spas brand parts and accessories are built to our highest standards of quality, durability and performance, and they are designed to work with your spa to ensure optimal performance and function. Only parts/components approved by Cal Spas should used when performing a warranty repair. If parts are required to complete a warranty claim, the cost of the parts are covered by this warranty. Approved labor and genuine part costs are covered when a warranty claim is approved, the cost of shipping parts/components is not covered by this warranty, and its the sole responsibility of the spa owner.

**Performance**

This warranty begins on the date of delivery of the spa, but in no event later than one year from the date of manufacture. To obtain service in the event of a defect covered by this Limited Warranty, notify your Cal Spas dealer or Cal spas as soon as possible and use all reasonable means to protect the spa from further damage. Upon proof of purchase, a designated service representative will correct the defect subject to the terms and conditions contained in this Limited Warranty. There will be no charge for parts or Labor to repair the defect, although providing access to affect the repair is your responsibility as the spa owner. Freight charges for replacement parts is the responsibility of the spa owner. Parts and components can be shipped to the servicing dealer or to the customer. The servicing dealer may charge the owner a travel/service fee as well as a diagnose fee if the cause of the issue is unknown, these charges are not covered under warranty. Your spa dealer nor Cal Spas is responsible for damages or costs to rebuild decks, cement structures, or other decor/structures placed against the sides of the spa. Minimum clearance of 3 feet on each side is mandatory for all spas. In the event that the spa is removed to a repair facility for repair and reinstalled, the cost of removal and re-installation will be your responsibility as the spa owner. If Lloyd’s Material Supply Company Inc., The manufacture of the Cal Spa brand determines that repair of the covered defect is not feasible, it reserves the right to provide a replacement spa of equal or lesser value to the original purchase price. In such an event reasonable costs for removal of the original spa, shipping costs from the factory for the replacement spa, and delivery and installation of the replacement spa will be the responsibility of the spa owner. The replacement spa will carry the balance of the original spa’s warranty. Spa covers are not included. This warranty ends either by specified time frame, owner-transfer of the spa, relocation, or installation of any component other than by the manufacture. If the desired spa is more expensive than what the spa owner originally financed or paid for, the price difference shall be paid by the spa owner. Additional costs can be incurred if the use of heavy machinery such as a crane, bulldozer, etc, is considered necessary to access, remove, or perform a repair/correction to the affected spa.

**Warranty limitations**

This Limited Warranty is void if Cal Spas or its designated representative determines that the spa has been subjected to alteration, neglect, misuse or abuse, or freight damage caused by the common carrier; any repairs have been attempted by anyone other than a designated representative; or if the failure is caused by accident, acts of God or other causes beyond the control of the Manufacturer including acts of nature (damage caused by animals, rodents, or other pests) are not covered by this warranty. Additionally; the limited warranty is void for spas that were subject to neglect, misuse and abuse including any installation, operation or maintenance of the spa other than in accordance with the instructions contained in the owner’s manual provided with the spa, including but not limited to the failure to maintain proper water chemistry, chemical balancing, the use of abrasives or improper cleaners, and the use of non-genuine parts and accessories. This Limited Warranty does not provide coverage for any item attached to or installed on the spa after the date of manufacture or for gaining access to any component for repair or replacement. Spa units in commercial use are excluded from any coverage whatsoever. The spa owner accepts liability for repair work performed by anyone other than Lloyd’s Material Supply Company Inc, or a designated Cal Spas representative. This Limited Warranty is void if damage occurs to the spa shell because of excessive heat buildup due to failure to cover a spa that is empty of water while exposed to direct sunlight.

**Proration of Warranty**

Units determined by the manufacture to be non-repairable will be replaced on a prorated basis with the same or a comparable unit. The owner will be charged 1% of the current retail cost for each full month of ownership from the date of purchase through the date failure is determined to be non-repairable. This charge will be waived during the first 6 months of ownership. [example]: Product failure is determined during seven months of ownership. Owner will be responsible to pay for 7% of the products current cost. As the spa owner you have the choice to replace the spa, with a spa equal to or less than the value of the originally financed/purchased spa; if the desired replacement spa is of a higher cost than the originally financed/purchased spa, the spa owner will pay the difference of price, including any percent value lost over time through the spas proration period. The cost of shipping a new spa and its installation is not covered by this warranty as stated in the “Performance” section of this warranty.

### Limitations

The manufacture disclaims all warranties, expressed or implied, in fact or in law, to the extent allowed by your State's law, including the warranty of merchantability and fitness for use, except as stated specifically herein. All warranty service must be performed by the manufacture or its designated representative using authorized Cal Spas parts. No agent, dealer, distributor, service company, or other party is authorized to change, modify, or extend the terms of this limited warranty in any manner whatsoever. The manufacture will not be responsible for any statements or representations made in any form that go beyond, are broader than, or are inconsistent with any authorized literature or specifications furnished by Cal Spas. Extended warranties or care plans offered to you by a spa dealer is an agreement strictly between the spa owner and the spa dealer, out of the control of the manufacture of Cal Spas.

### Disclaimers

Lloyd's Material Supply Company, Inc., Manufacture of Cal Spas brand and its representatives shall not be liable for any injury, loss, cost, or other damage whether incidental or consequential, arising out of any defect covered by this limited warranty, including without limitation, loss of use of the spa and cost for removal of defective produce even if the manufacture was advised of the possibility of damage. The liability of the manufacture under this limited warranty, if any shall not exceed the original amount paid for the defective product. Coverage under this limited warranty shall commence as of the original date of delivery and the duration of such coverage shall not extend for any reason whatsoever beyond the stated time periods. These disclaimers shall be equally applicable to any service provided by the manufacture and its designated representatives.

### Legal Rights

This limited warranty gives you specific legal rights. You may also have other rights that vary from state to state depending on consumer regulations. Some states do not allow limitations on how long an implied warranty lasts, so this time limitation may not apply to you.

### Additional Disclaimers

Spa owners who have purchased a Cal Spa, and the spas final resting place is not in the United States or Canada, Cal Spas will be able to send components and parts directly to the spa customer if the original Cal Spa dealer is not within range of the spa. It is the responsibility of the spa owner to find a experienced electrician, plumber, or technician to perform the necessary repairs. A preliminary over the phone technical meeting with a Cal Spas representative is necessary, to ensure the experienced laborer is familiar with the spas operation, and recommended repair methods. Labor costs of a repair in such circumstances must be first approved by a Cal Spas representative, before moving forward with any repairs covered in this warranty. It is advised to request a labor quote from said experienced laborer, and to send this quote to a Cal Spas representative. If all prerequisites are met and the repair is approved, Cal Spas will reimburse the cost of labor directly to the spa owner upon completion of repairs. Reimbursements of charged labor will be given as a written check to be delivered to the spa owners residence, with a varying estimated disbursement window.

For all repairs/warranty claims within the United States and Canada and other nations, may be required to send parts/components back to Cal Spas when deemed necessary. In some circumstance where shipping the component/part is necessary, Cal Spas will provide a shipping label to send the affected or requested components/parts. It is the responsibility of the spa owner to properly package and secure the package for shipping. In some circumstances only images and proof of purchase would be necessary to file a warranty claim, in such circumstances if a Cal Spas representative deems that the parts do not have to be returned, follow all local regulations and laws to properly dispose of said components.





[www.CalSpas.com](http://www.CalSpas.com)

**CONTACT INFORMATION**

For customer service or service technicians, please contact your authorized dealer immediately. If you need additional information and/or assistance, contact

**CAL SPAS**

*Lloyd's Material Supply Company, Inc.*  
Customer Service Department  
1462 East Ninth Street, Pomona, CA 91766

**Toll Free: 1-800-CAL-SPAS**  
Fax: 1-909-629-3890

**LTR.2026.1020**  
**1/17/2026 Rev C**